




SGX

SENSORTECH

An Amphenol Company



SGX-NH3-500

Ammonia sensor Datasheet

SGX Liquid Electrochemical Gas Sensors

These SGX Sensors use a revolutionary innovation in electrochemical sensing, which detects the output signals from the electrochemical reactions of different gases. Furthermore, it accurately measures gas concentration through the magnitude of the signal. These specialised sensors consist of three catalytic electrodes, liquid electrolyte and gas diffusion holes. Through the diffusion holes, the gas reaches the sensor's working electrode, where an electrochemical reaction takes place at the so-called 3-phase boundary. A current signal is generated at the output, which is linearly proportional to the gas concentration.



Quality, Safety, Responsibility

Technical Specifications

Performance

Sensitivity	15 ± 5 nA/ppm
Measurement Range	0 – 500 ppm
Zero Current	± 300 nA
Maximum Overload	1000 ppm
Response Time	T50 < 20s, T90 < 50s
Repeatability	< 2%
Lower Detectable Limit (LDL)	≤ 1 ppm
Linear Range	500 ppm
Resolution (16Bit ADC)	<0.1ppm

Environmental Details

Temperature Range	-30°C to +55°C
Pressure Range	800 to 1200 hPa
Operating Humidity Range	15-95% RH
Storage Temperature	0 to 20°C

Lifetime Details

Long-Term Drift	< 1 %/month
Expected Lifetime	> 24 months
Zero Drift in Clean Air	< 10 ppm
Storage conditions	0-20°C
Storage Life	6 months
Warranty	12 months

Operation

Operating Principle	Amperometric
Bias Voltage	0 mV
Recommended Load Resistor	10 to 220 Ω
Warm Up Time	< 60 s

Housing

Housing Material	PPO
Weight	< 6g



Features

- Small size
- Water based electrolyte
- High selectivity
- High sensitivity
- Excellent sensitivity at low temperatures
- Double sealed housing for advanced leakage protection



Key applications


- Gas measurement equipment
- Environmental air monitoring
- Leak detection
- Emissions
- TLV-monitoring
- Food and Refrigeration Industry
- Cooling Systems



Important Notes

- All performance is based on conditions at 20°C, 50% RH and 1 atm, flow rate>150qcm/min, using SGX recommended circuitry.
- Sensor performance is temperature dependant; please contact SGX for temperature performance other than 20°C.
- Do not solder to the connector pins as this may damage the sensor and thereby invalidate the warranty.
- Details on recommended connector pins can be found in the Frequently Asked Questions within the Gas Sensor section of the SGX website.

Dimensions

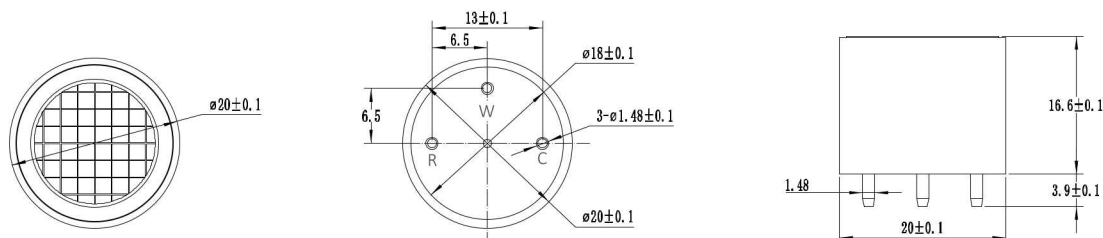


Cross Sensitivity

Gas	Formula	Test Concentration	Sensor Reading
Carbon Dioxide	CO ₂	5000ppm	0ppm
Carbon Monoxide	CO	100ppm	0ppm
Chlorine	CL ₂	1ppm	0ppm
Hydrogen	H ₂	100ppm	0ppm
Hydrogen Sulphide	H ₂ S	50ppm	20ppm
Arsine	AsH ₃	0.2ppm	0ppm
Hydrogen Chloride	HCL	5ppm	0ppm
Nitrogen Dioxide	NO ₂	10ppm	0ppm
Sulphur Dioxide	SO ₂	20ppm	0ppm

Note:

- 1) The above interference factors may vary due to different sensors and service life, please refer to the actual test results.
- 2) This table is not complete for all cross gases, other gas please contact with us.

Temperature Curve

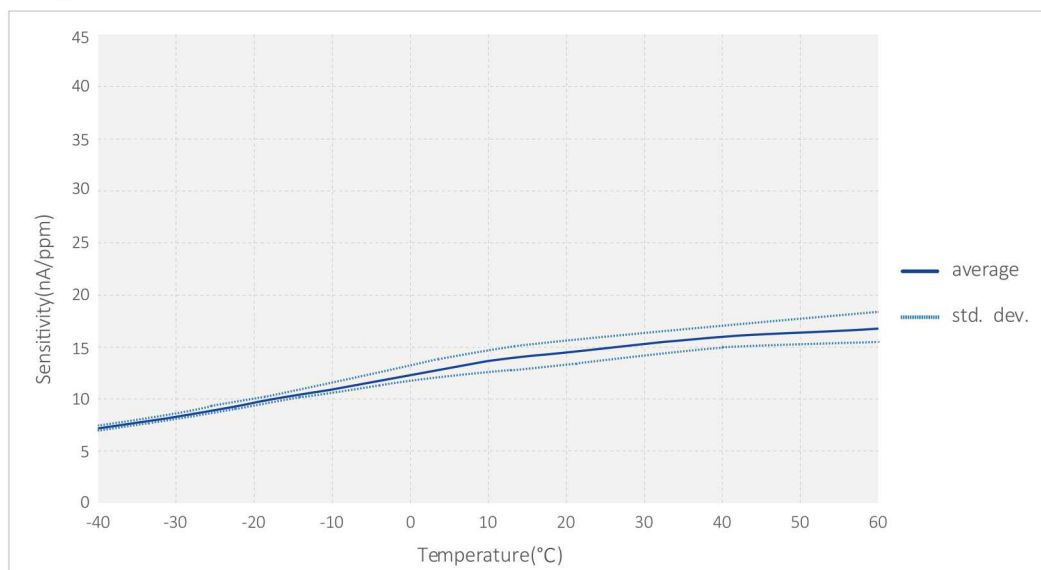

Disclaimer

SGX Europe Sp. z o.o. reserves the right to change design features and specifications without prior notification. We do not accept any legal responsibility for customer applications of our sensors. SGX Europe Sp. z o.o. accepts no liability for any consequential losses, injury or damage resulting from the use of this document, the information contained within or from any omissions or errors herein. This document does not constitute an offer for sale and the data contained is for guidance only and may not be taken as warranty. Any use of the given data must be assessed and determined by the user thereof to be in accordance with federal, state and local laws and regulations. All specifications outlined are subject to change without notice.

Warning

SGX Europe Sp. z o.o. sensors are designed to operate in a wide range of harsh environments and conditions. However it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments and operation. When using sensors on printed circuit boards (PCBs), degreasing agents should be used prior to the sensor being fitted. By the nature of the technology used, any electrochemical gas sensor offered by SGX Europe Sp. z o.o. can potentially fail to meet specification without warning. SGX Europe Sp. z o.o. makes every effort to ensure the reliability of our products of this type, where life safety is a performance requirement of the product, we recommend that all sensors and instruments using these sensors are checked for response to gas before use. SGX Europe Sp. z o.o. reserves the right to make product changes without notice. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale. The products are always subject to a program of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of SGX Europe Sp. z o.o., we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application. Performance characteristics on this data sheet outline the performance of newly supplied sensors. Output signal can drift below the lower limit over.

Copyright© 2012-2022 SGX Sensortech All rights reserved.

Trademarks and registered trademarks are the property of their respective owners.

No part of this publication may be reproduced, distributed, or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other non-commercial uses permitted by copyright law.

For permission requests or technical support please contact or write to the publisher, addressed "Attention: Permissions Coordinator,".