


# CLG Series

60~200W Single Output with PFC

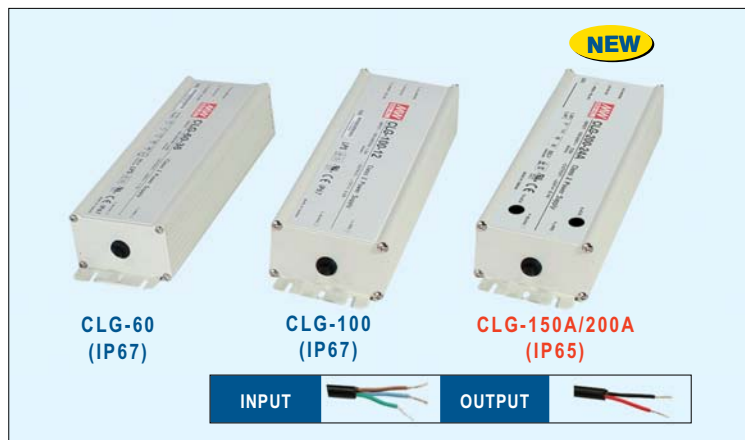

## ■ Features

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in active PFC function
- IP67 / IP65 design for indoor or outdoor installations
- OCP point adjustable through output cable or internal potential meter (CLG-150/200)
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Optional model for CLG-150/200:  
B-Type: IP67 rated and constant current level adjustable through output cable  
C-Type: Terminal block for I/O connection
- 3 years warranty

## ■ General Specification (Please refer to [www.meanwell.com](http://www.meanwell.com) for detail spec.)



Model No.	CLG-60	CLG-100	CLG-150 <b>NEW</b>	CLG-200 <b>Developing</b>
AC input voltage range	90~264VAC; 120~370VDC		90~280VAC; 127~396VDC	
AC inrush current (max.)	Cold start, 40A at 230VAC		Cold start, 80A at 230VAC	
DC adjustment range	Fixed. Can be modified between $\pm 10\%$ (CLG-60) or 0~-15% (CLG-100) rated output voltage		A and C type can be adjusted by internal potential meter	
Current adjustment range	Fixed. Can be modified between +3%~-25% rated output current		Can be adjusted by internal meter (A and C type) or through output cable (B type)	
Overload protection	95%~130% constant current, auto-recovery	95%~100% constant current, auto-recovery	100%~110% constant current limiting, auto-recovery	
Over voltage protection	115%~140%	107%~135%	110%~135% rated output voltage	
Setup, rise, and hold up time	1500ms, 150ms, no hold up time	1200ms, 80ms, 60ms at full load and 230VAC	3000ms, 80ms, 50ms at full load and 230VAC	
Withstand voltage	I/P-O/P: 4.25KVDC		I/P-O/P: 3KVAC, I/P-FG: 1.5KVAC, O/P-FG: 0.5KVAC	
Working temperature	-30~+70°C (refer to output derating curve)			
Safety standards	UL1310 Class 2, EN61347-1, EN61347-2-13, CAN/CSA-C22.2 No.223-M91 (except for 48V) approved, TUV EN60950-1 also for CLG-100		Design refer to UL60950-1, EN61347-1, EN61347-2-13	
EMC standards	EN55015, EN55022 class B, EN61000-3-2,3, EN61000-4-2,3,4,5,6,8,11, ENV50204, EN61547			
Connection	Input	UL rated, 18AWGx3C (30cm)		UL rated, 18AWGx3C (30cm); Terminal block for C type option
	Output	UL rated, 18AWGx2C (30cm)		A type: 14AWGx2C (30cm) B type: 14AWGx2C (30cm)+18AWGx2C (30cm) C type: Terminal block
Dimension (L*W*H)(mm)	172x 61.5x 39	222x 68x 39	222x 68x 39	242x 68x 39
Case No.	957A	954A	954A	-----
Packing	16pcs / 14.8kg	12pcs / 13kg	12pcs / 13kg	-----

## ■ 60W (Class 2) CLG-60

Stock No.	Model No.	Output	Tol.	R&N	Effi.
11461	CLG-60-12	12V, 0~5.0A	$\pm 10\%$	2.0V	83.0%
11462	CLG-60-15	15V, 0~4.0A	$\pm 10\%$	2.4V	84.5%
11463	CLG-60-20	20V, 0~3.0A	$\pm 10\%$	1.8V	86.5%
11464	CLG-60-24	24V, 0~2.5A	$\pm 10\%$	2.7V	86.5%
11465	CLG-60-27	27V, 0~2.3A	$\pm 10\%$	2.7V	87.0%
11466	CLG-60-36	36V, 0~1.7A	$\pm 10\%$	3.6V	87.0%
11467	CLG-60-48	48V, 0~1.3A	$\pm 10\%$	4.6V	88.0%

## ■ 150W CLG-150 **NEW**

Stock No.	Model No.	Output	Tol.	R&N	Effi.
11621	CLG-150-12 <b>A</b>	12V, 0~11.0A	$\pm 2\%$	150mV	88%
11622	CLG-150-15 <b>A</b>	15V, 0~9.50A	$\pm 2\%$	150mV	88%
11623	CLG-150-20 <b>A</b>	20V, 0~7.50A	$\pm 1\%$	150mV	90%
11624	CLG-150-24 <b>A</b>	24V, 0~6.30A	$\pm 1\%$	150mV	90%
11625	CLG-150-30 <b>A</b>	30V, 0~5.00A	$\pm 1\%$	150mV	90%
11626	CLG-150-36 <b>A</b>	36V, 0~4.20A	$\pm 1\%$	150mV	89%
11627	CLG-150-48 <b>A</b>	48V, 0~3.20A	$\pm 1\%$	200mV	89%

□ = A (standard models) or B, C (optional models)

## ■ 96W (Class 2) CLG-100

Stock No.	Model No.	Output	Tol.	R&N	Effi.
11471	CLG-100-12	12V, 0~5.00A	$\pm 3\%$	150mV	83%
11472	CLG-100-15	15V, 0~5.00A	$\pm 3\%$	150mV	85%
11473	CLG-100-20	20V, 0~4.80A	$\pm 3\%$	150mV	87%
11474	CLG-100-24	24V, 0~4.00A	$\pm 3\%$	150mV	87%
11475	CLG-100-27	27V, 0~3.55A	$\pm 3\%$	150mV	87%
11476	CLG-100-36	36V, 0~2.65A	$\pm 2\%$	150mV	87%
11477	CLG-100-48	48V, 0~2.00A	$\pm 2\%$	200mV	87%

## ■ 200W CLG-200 **Developing**

Stock No.	Model No.	Output	Tol.	R&N	Effi.
11651	CLG-200-12 <b>A</b>	12V, 0~14.0A	$\pm 2\%$	150mV	91%
11652	CLG-200-15 <b>A</b>	15V, 0~12.0A	$\pm 2\%$	150mV	91%
11653	CLG-200-20 <b>A</b>	20V, 0~10.0A	$\pm 1\%$	150mV	93%
11654	CLG-200-24 <b>A</b>	24V, 0~8.40A	$\pm 1\%$	150mV	93%
11655	CLG-200-30 <b>A</b>	30V, 0~6.67A	$\pm 1\%$	150mV	93%
11656	CLG-200-36 <b>A</b>	36V, 0~5.60A	$\pm 1\%$	150mV	92%
11657	CLG-200-48 <b>A</b>	48V, 0~4.20A	$\pm 1\%$	200mV	92%

□ = A (standard models) or B, C (optional models)