

world leaders in the art of linear measurement

SI3100

New Instrument / Controller for use with Solartron LVDT Gauging Probes and Displacement Transducers



Features


- 2 LVDT inputs
- Simple Menu System
- Single channel Display
- 7 digit Colour Display (user selectable)
- Analogue Display with auto coarse/fine resolution
- Auto display colour change for in/out range
- Peak hold facility
- Discrete I/O for each transducer input
- 4-20mA or DC output
- RS232 output
- Front panel IP 65 protection

Description

The New SI3100 Controller is an instrument designed to maximise the performance of Solartron Metrology's extensive range of LVDT Gauging Probes and Displacement Transducers. The instrument features an intuitive, menu-driven colour display which can be programmed to set limits or alarms and record other parameters.

Powered from a 24Vdc source, the SI3100 can be used to display one or two transducer readings, computed results from two transducers such as, A, B, A+B, A-B, $(A+B/2)$, $(A-B/2)$, and computations with constants, e.g. angle measurements.

Full set up is made via the IP65 protected front keypad that can, if required, be password protected. The SI 3100 also features discrete inputs/outputs and a selection of Analogue outputs in the form of 4-20mA or DC voltage.





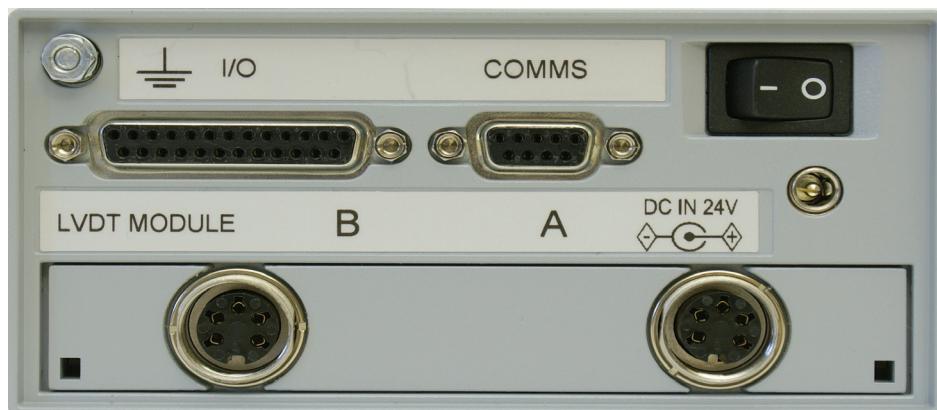


Technical Specification

Product type	SI3100 - 2 Channel LVDT
Display type	Colour LCD display 40Hz update rate with 30° Viewing Angle
Display length (mm) Display length (inches)	XX.XXXXX X.XXXXXX
Resolution (µm)	Down to 0.05 µm or 0.000005"
Analogue Display	Colour Solid vertical bar
Transducer Excitation	LVDT
AC Primary Voltage (VAC rms)	3.0 V RMS
Primary Frequency (kHz)	5kHz or 10kHz
Signal Input (sensitivity range)	55mV to 500mV Full range
Input load resistance (k Ohm)	2k, 10k 100k
External input/output	
Serial	RS232 serial port (for printer or PC).
Discrete Output	six isolated discrete outputs (Channel A, Lo, OK, HI), (Channel B, Lo, OK, HI)
Analogue Output	2 Channels either configured 4-20mA or DC Voltage
Keypad	Membrane Keypad with 9 keys: Print, Zero, Up, Down Left, Right, Enter, Peak hold/Track, Menu.
Measurement configurations	
Data Logging	Not available
Number of transducer inputs	1 or 2 (user selectable)
Measurement type	A, B, A+B, A-B, (A+B)/2, (A-B)/2, (B-A/a)
Indications	Measurement Mode, Type of measurement, Lower and Upper Limits, Measurement out of Limits
Electrical	
Power supply (VDC)	+24 VDC +/- 10%
Mechanical and Enviromental	
Mounting	Bench Top or Panel mount options
Sealing	Front Panel IP65, Case IP51, Rear Connectors IP51
Mass	1.1kg
Temperature	Operating temperature from 0°C to +50°C storage between -20°C to +85°C
EMC	Immunity:EN6100-6-2:2001, Emissions: EN61000-6-3:2001
Dimensions	W x H x D(mm): 134 x 65 x 160 excluding bezel W x H x D(mm): 144 x 74 x 175 including bezel

Part Number	
Base Unit	911360
Unit with Setup	911381

Also Available at Solartron Metrology



Solartron Metrology Offices

Addresses for Offices worldwide

United Kingdom - Head Office
Solartron Metrology
Steyning Way
Bognor Regis
West Sussex
PO22 9ST

Tel: +44 (0) 1243 833333
Fax: +44 (0) 1243 833332
sales.solartronmetrology@ametek.com

China - Shanghai
Solartron Metrology
Rm 912, Metro Tower
No 30 Tian Yao Qiao Road, Shanghai
200030

Tel: +86 21 6426 8111
Fax: +86 21 6426 7818
china.solartronmetrology@ametek.com

Japan
Solartron Metrology
4-5-37 Kamiosaki
Shinagawa-Ku
Tokyo
141-0021

Tel: +81(0) 3 3494 5131
Fax: +81 (0) 3 3494 5134
japan.solartronmetrology@ametek.com

Germany
Ametek GmbH
Solartron Metrology Division
Rudolf-Diesel-Strasse 16
40670 Meerbusch

Tel: +49 (0) 2159 9136 500
Fax: +49 (0) 2159 9136 505
vertrieb.solartronmetrology@ametek.com

China - Beijing
Solartron Metrology
Room 2202, CITIC Building
#19, Jianguomenwai Dajie
Beijing
100004 P.R China

Tel: +86 10 8526 2111
Fax: +86 10 8526 2141
china.solartronmetrology@ametek.com

U.S.A
Solartron Metrology
915 N. New Hope Road
Suite C, Gastonia
NC 28054, USA

Tel: +1 800 873 5838
Fax: +1 704 868 8466
usales.solartronmetrology@ametek.com

France
Solartron Metrology
Rond-point de l'Epine des Champs
Buroplus - Bat D
Elancourt, 78990

Tel: +33 (0)1 30 68 89 50
Fax: +33 (0)1 30 68 89 59
france.solartronmetrology@ametek.com

China - Chengdu
Solartron Metrology
AMETEK ChengDu Rep Office
Room 2408, Zongfu Building
35 Zongfu Road
Chengdu, Sichun, 610016, China

Tel: +86 28 8675 8111
Fax: +86 28 8675 8141
china.solartronmetrology@ametek.com

Agent and Distributor details available at www.solartronmetrology.com

