




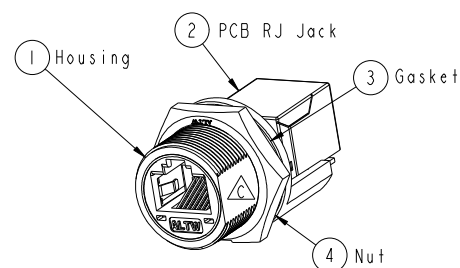
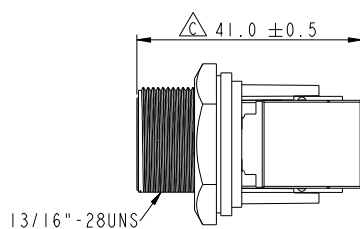


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	LEN15C0246	2015-12-16	Jinhai	凸字底部修平
E	LEN1810008	2017-11-28	Jalam	Modify The Tolerance
F	C190405	2019/03/14	Ruru	Modify Note



Note:

- * Important Dimension
- * Waterproof Rate : IP67, Mated
- * Housing: Thermoplastic, Black
- * Nut: Thermoplastic, Black
- * Gasket : Rubber, Gray.
- * PCB: FR-4
- * Jack : Thermoplastic
- * Use without Waterproof cap or Dust cap
For Panel Thickness Max: 4.2mm
- * Use with Waterproof cap or Dust cap
For Panel Thickness Max: 3.0mm
- * Screw torsion value range: 8~12kgf-cm
- * Gasket and Nut are packed separately
in PE bags.



UNIT: mm		TITLE		Amphenol LTW		ITEM NO.	DRWN BY	DATE
TOLERANCE		RJ45,C SIZE,MATED WP		安費諾亮泰企業股份有限公司		RCP-5SPFFH-SCM7001	Ruru	2019-03-14
.X	±0.25	SCALE	1:1	SIZE	A4	DRG NO.	CHECKED BY	DATE
.XX	±0.1	REV.	F	WC-REV.	C.4	RCP-5SPFFH-SCM7001	Rita	2019-03-14
.XXX	±0.05	SHEET 1 OF 1		CUSTOMER		ALTW	APPROVED BY	DATE
ANGLES	±1°	QC: Inspection item					Max	2019-03-14