

LIGHT ENGINE 2X6 FIT


Issue Date	Jul - 2017
Issued by	Wilbur C.

Applications

- Highbay
- Street Light
- Gas station
- Projectors
- Decorative Poles

Characteristics

- Module Efficacy – up to 158 lm/W
- L70 > 50.000 hours
- CRI > 80 (Typ.85)
- 03 SDCM
- CCTs 3.000K / 4.000K / 5.000K
- 05 years warranty

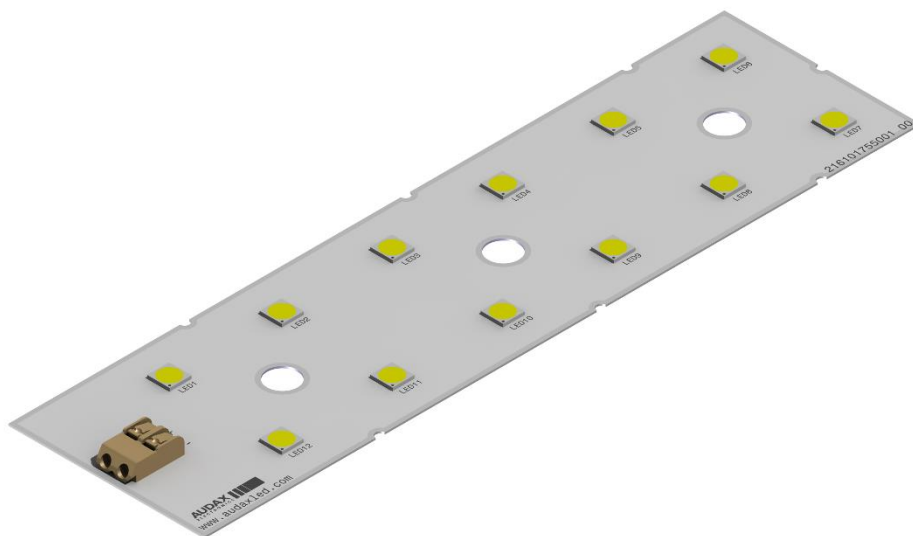

DRIVE CURRENTS

Parameter	Nominal	Max
Light Engine 2X6 FIT	700 mA	1250 mA

MODULE TEMPERATURES

Parameter	Nominal	Max
Tc (case temperature at Tc point)	60 °C	85 °C

PRODUCT PART NUMBER

80169300100	80169400100	80169500100
2.700 K	4.000 K	5.000 K

TECHNICAL INFORMATION

CCT	LED Driver Current (mA)	# LEDs	Luminous Flux (lm)*	Forward Voltage (V)	LED Forward Current (mA)	TC (°C)	Power (W)	Efficacy (lm/W)*
2.700 K	1.050	12	5.855	49,0	175	60	51,5	114
4.000 K	1.050	12	6.389	49,0	175	60	51,5	124
5.000 K	1.050	12	6.389	49,0	175	60	51,5	124


LED TYPE

Manufacturer: LUMILEDS

LED Series: 5050

MECHANICAL DRAWING

Drill Table			
Hole Dia (mm)	Symbol	Quantity	Plated
2.10	+	12	No
3.20	X	3	No

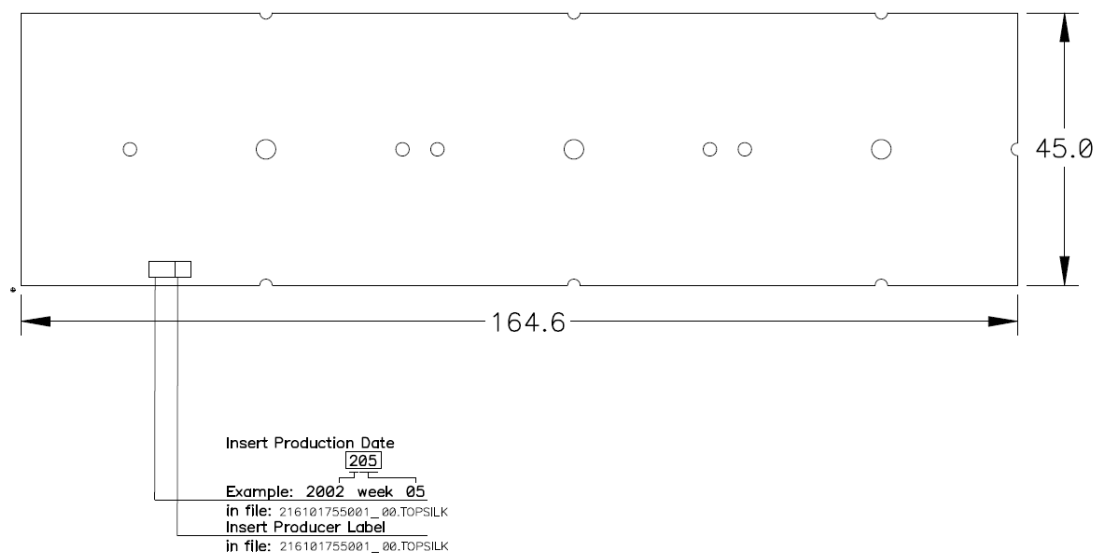

Unit: mm

WIRING

Specification item	Value	Unit	Condition
Input wire cross- section	0.25...0.75 18...24	mm ² AWG	Solid wire
Input wire strip length	7.5...8.5	mm	Solid wire
Input wire cross-section	0.33...0.5 20...22	mm ² AWG	Stranded wire
Input wire strip length	7.5...8.5	mm	Stranded wire