

Differential Pressure Sensing using ICM-20789 for Altitude-hold in Drones

1 PURPOSE

This document explains the process of using differential pressure measurements of two pressure sensors to mitigate the challenge with altitude hold that is subject to ambient pressure changes.

TABLE OF CONTENTS

1	Purpose	2
2	Problem Overview	4
3	Solution.....	5
4	Experimental setup.....	7
5	Conclusion	8
6	References	9
7	Revision History	10

2 PROBLEM OVERVIEW

Pressure sensors are commonly used as an altitude (height) gauge in drones with respect to initial ground level. The assumption made here is the pressure value remains constant for a given period of time. Several environmental factors common in doors are HVAC on/off and the opening and closing of doors could change the pressure values during the flight, misleading the drone to correct for change in pressure, which results in loss of altitude-hold.

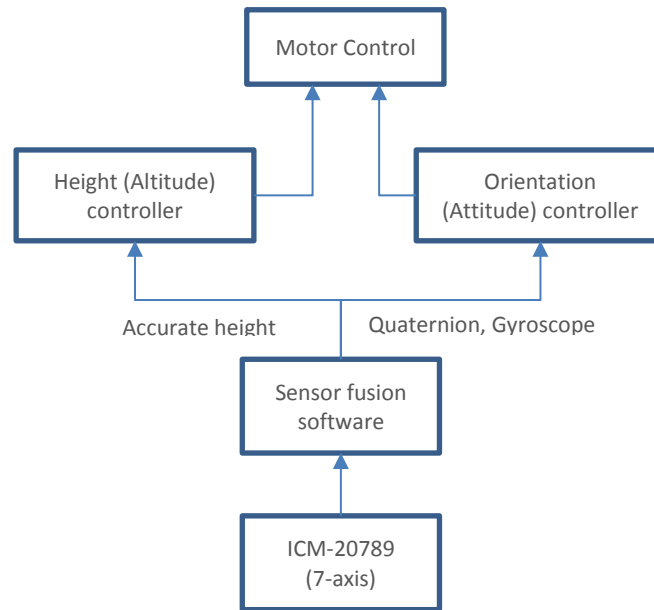


Figure 1. Simplified block diagram for altitude Controller on a Quadcopter using ICM-20789

Change of 1 Pa = 8.5 cm in height at sea level. A 10 Pa change can cause 90 cm (3ft) change in height that would cause the drone to hit the ceiling or the floor depending on decrease or increase in pressure and lose complete control.

Figure 2 illustrates the pressure changes observed in a room when opening a door. For the above experiment the pressure sensor data was captured using ICM-20789 placed stationary in a room while the door was opened/closed 6 times. The pressure changed from 101288 to 101300 which ~ 12 Pa. The pressure sensor is filtered for illustration.

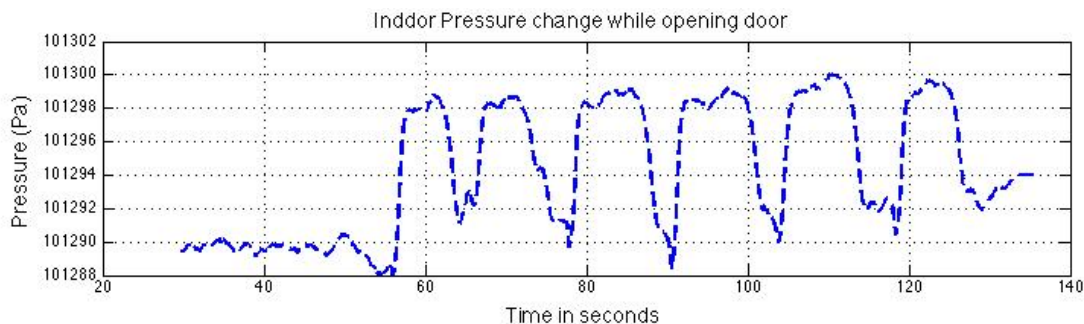


Figure 2. Pressure data from ICM-20789 placed in stationary in a room

3 SOLUTION

Provide a second pressure sensor (P-stationary) which is stable in height, not attached to the drone and is witnessing the same environment as the drone. Have a method to communicate in real time to the drone the measured value of the environment pressure that will be used to subtract from the pressure seen by the first pressure sensor (P-drone) which is attached to the drone. The difference pressure (P-system) is then used for altitude hold in the drone system.

$$P\text{-system} = (P\text{-drone}) - (P\text{-stationary})$$

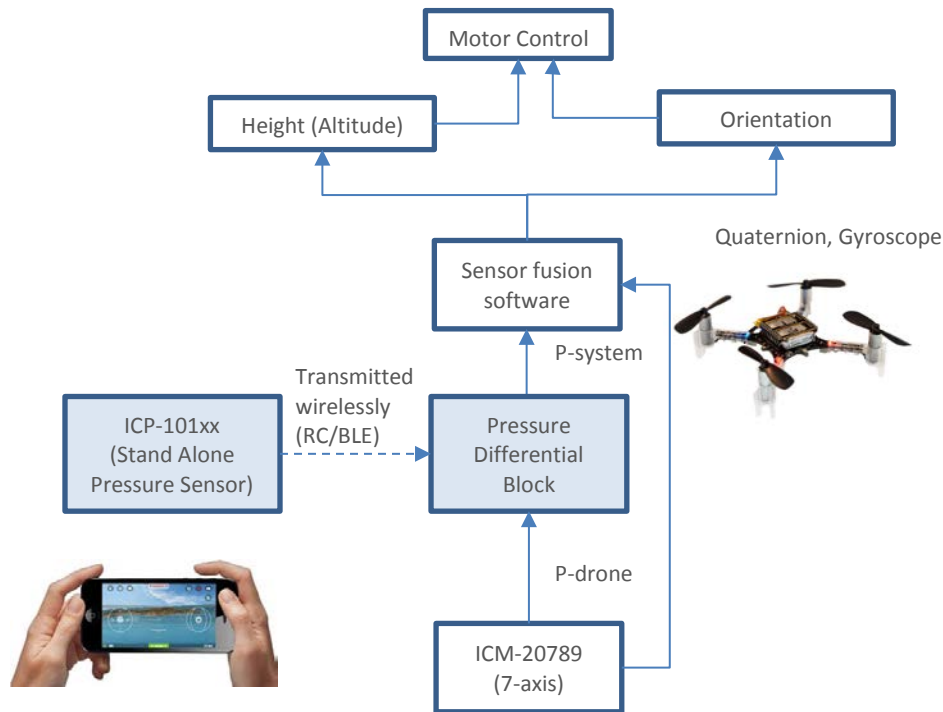


Figure 3. Simplified diagram for differential pressure concept

Controller: The system can be imagined as two parts. The controller and the drone. The controller could be RC or a phone with pressure sensor capability and a way to communicate the pressure sensor data to the drone. A single axis stand-alone pressure sensor, ICP-101xx, is sufficient on the controller. The P-stationary can be generated using the RC/Phone or similar controller communicating with the drone. Other ground station / telemetry method can be used as well.

Drone: The drone can get the ambient pressure data and compare it with the pressure data seen by the drone itself. In the drone's control loop for height stabilization the assumption of constant pressure (P-drone) is made and any change in pressure is attributed to change in height rather than change in environmental pressure. This leads the drone to compensate the height as it is tasked to do and creating altitude-hold. A compensated pressure (P-System) would be perfect as any change in pressure is now associated with change in drone height rather than ambient pressure.



Figure 4. Differential pressure sensor graph

Figure 4 shows differential pressure measurements being used in a drone system. To simplify the problem, one needs to look at only relative pressure changes and bring both P-stationary and P-drone to same relative number which is close to zero. This action can be achieved before take-off to zero out the offsets. The P-System is a differential measurement of the pressure sensor data from the room pressure sensor and the one experienced by the drone. The P-System is more reliable than the P-drone and can maintain excellent altitude hold in fluctuating environmental pressure conditions. The above diagram and figure are simplified, improved results can be achieved by including filter blocks to reduce the noise level and as well adjust the PID loop to accommodate the increased common noise.

ICM-20789 has pressure noise as low as 0.4 Pa RMS, and relative accuracy performance of 1 Pa which enables excellent altitude hold in drone applications for both single or differential pressure drone systems.

4 EXPERIMENTAL SETUP

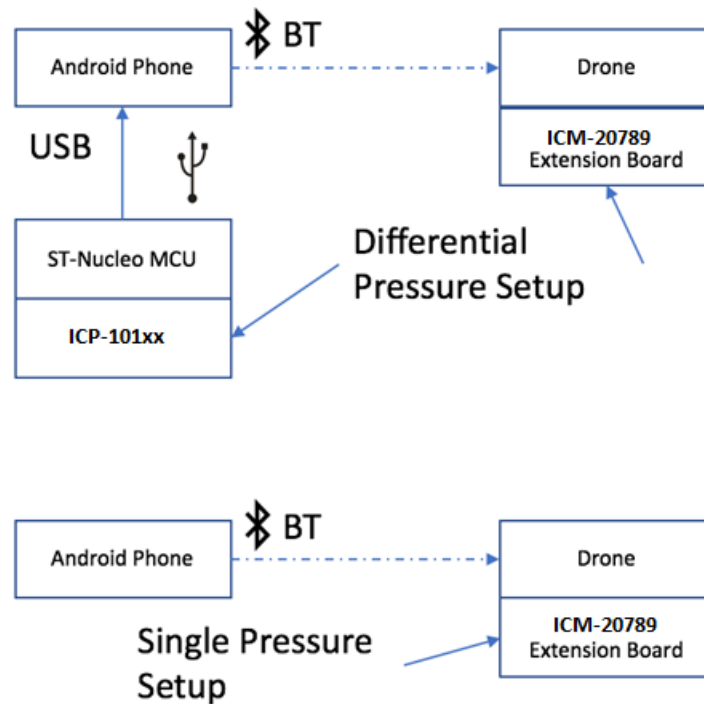


Figure 5. Experiment setup

1. **Drone:** Crazyflie 2.0 fitted with ICM-20789 extension board [3] . Crazyflie software is modified to accommodate the extension board and make provision for single vs differential mode of working.
2. **Controller:** Android Phone with external ICP-101xx on ST-Nucleo board via USB is connected to the phone. Android app was modified to take the external pressure sensor via USB peripheral. The ST-Nucleo board was used to mount the ICP-101xx to communicate the pressure Via USB to the phone.

The data, code base for the android app, Crazyflie drone, ST-Nucleo setup is not covered in the scope of the document.

Experiment: Two drones are flown simultaneously with one having only the single pressure (P-drone=P-System) altitude-hold software and the second drone uses differential (P-system = P-drone minus P-Stationary) output for altitude hold. The door leading from outside to the room is opened and closed to see the effect of the pressure variation and height control of the drone. In this experiment once launched the throttle is not updated and only the pitch/roll is controlled to limit the horizontal drift.

Results: [The Video link here](#) shows the concept in action and the above data graphs are excerpts from the differential experiments.

5 CONCLUSION

Differential Pressure sensing using an external pressure sensor that is at a static altitude delivers excellent altitude hold performance in harsh environmental pressure changes, commonly experienced indoors. Figure 4 and the video shows the benefits of the differential pressure sensing system.

6 REFERENCES

1. ICM-20789, <https://www.invensense.com/products/motion-tracking/7-axis/>
Contact us for more: sales@invensense.com
2. ICP-101xx, <https://www.invensense.com/products>
Contact us for more: sales@invensense.com
3. Crazyflie 2.0 Specification: <https://www.bitcraze.io/crazyflie-2/>
4. Crazyflie 2.0 Source Code: <https://github.com/bitcraze/crazyflie-firmware>
5. Video link for differential drone: <https://youtu.be/ka3aWVNYosA>

7 REVISION HISTORY

DATE	REVISION	DESCRIPTION
02/13/17	1.0	Initial Release
10/04/17	1.1	Updated part numbers, content

This information furnished by InvenSense, Inc. ("InvenSense") is believed to be accurate and reliable. However, no responsibility is assumed by InvenSense for its use, or for any infringements of patents or other rights of third parties that may result from its use. Specifications are subject to change without notice. InvenSense reserves the right to make changes to this product, including its circuits and software, in order to improve its design and/or performance, without prior notice. InvenSense makes no warranties, neither expressed nor implied, regarding the information and specifications contained in this document. InvenSense assumes no responsibility for any claims or damages arising from information contained in this document, or from the use of products and services detailed therein. This includes, but is not limited to, claims or damages based on the infringement of patents, copyrights, mask work and/or other intellectual property rights.

Certain intellectual property owned by InvenSense and described in this document is patent protected. No license is granted by implication or otherwise under any patent or patent rights of InvenSense. This publication supersedes and replaces all information previously supplied. Trademarks that are registered trademarks are the property of their respective companies. InvenSense sensors should not be used or sold in the development, storage, production or utilization of any conventional or mass-destructive weapons or for any other weapons or life threatening applications, as well as in any other life critical applications such as medical equipment, transportation, aerospace and nuclear instruments, undersea equipment, power plant equipment, disaster prevention and crime prevention equipment.

©2017 InvenSense. All rights reserved. InvenSense, MotionTracking, MotionProcessing, MotionProcessor, MotionFusion, MotionApps, DMP, AAR, and the InvenSense logo are trademarks of InvenSense, Inc. The TDK logo is a trademark of TDK Corporation. Other company and product names may be trademarks of the respective companies with which they are associated.



©2017 InvenSense. All rights reserved.