UF15AC series

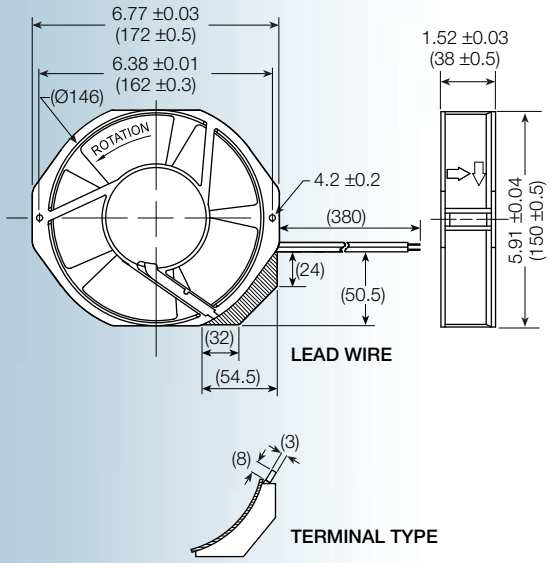

Size: (172 x 150 x 38 mm)
6.77 x 5.91 x 1.52 inches

Features: ***capacitor start motor***

Operating voltage (VAC): 115 or 230

Construction: aluminum die cast frame; UL94V-0 PBT impeller

Bearing option: motor quality ball bearings

Motor: capacitor start

Air flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal

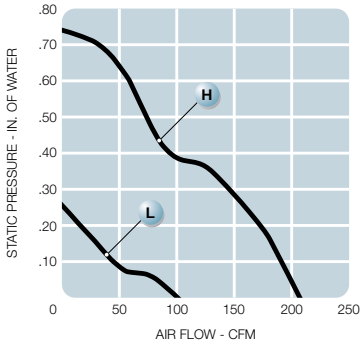

Model No.	Rated Voltage V	Freq. HZ	Input Power W	Rated Cur. A	Locked Cur. A	Speed RPM	Air Volume M^3/Min	Air Volume CFM	Max Static Pressure (H_2O) MM	Max Static Pressure (H_2O) INCH	Sound Noise dB	Wt OZ
UF15AC12-__H	115	60	28	0.23	0.38	3,400	6.0	212	19.0	0.75	58	25.4
UF15AC23 -__H	230	60	26	0.11	0.18	3,400	6.0	212	19.0	0.75	58	25.4
UF15AC12-__L	115	60	28	0.15	0.20	1,700	2.9	103	6.5	0.26	44	25.4
UF15AC23 -__L	230	60	26	0.07	0.10	1,700	2.9	103	6.5	0.26	44	25.4

www.mechatronics.com *E-mail: Sales@Mechatronics.com* *Fax: 425-222-5155* *Tel: 425-222-5900* *800-453-4569*