



UF15KM series

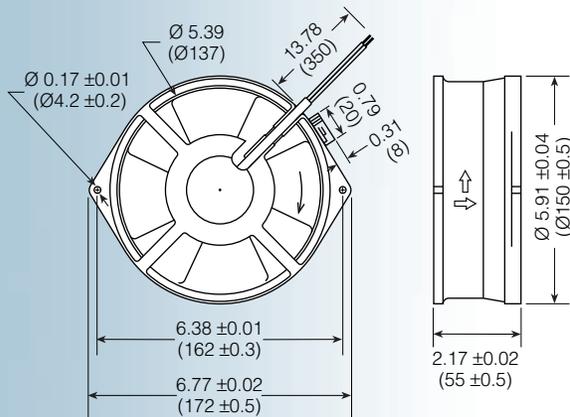

LEAD WIRE



TERMINAL TYPE

Size: (172 x 150 x 55 mm)
6.77 x 5.91 x 2.17 inches

Features: *metal frame and impeller; Class F (155°) insulation; operating temperature range -40°C ~ 90°C; high-temp bearing lubricant*

Operating voltage (VAC): 115 or 230

Construction: aluminum die cast frame; metal impeller


Bearing option: motor quality ball bearings

Motor: shaded pole

Air flow: exhaust over struts

Connection: terminal or 22 AWG lead wire

Protection: thermal

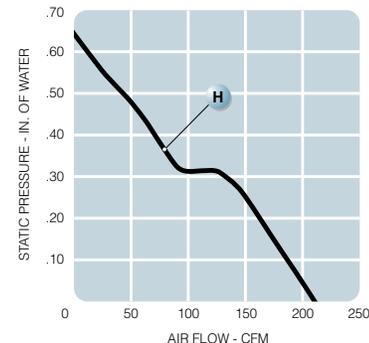

| Model No. | Rated Voltage V | Freq. HZ | Input Power W | Rated Cur. A | Locked Cur. A | Speed RPM | Air Volume | | Max Static Pressure (H ₂ O) | | Sound Noise dB | Wt OZ |
|--------------|--------------------|-------------|------------------|-----------------|------------------|--------------|---------------------|-----|--|------|-------------------|----------|
| | | | | | | | M ³ /Min | CFM | MM | INCH | | |
| UF15KM12-__H | 115 | 60 | 42 | .047 | 0.75 | 3,250 | 6.5 | 230 | 16 | 0.63 | 53 | 39 |
| UF15KM23-__H | 230 | 60 | 42 | .023 | 0.37 | 3,250 | 6.5 | 230 | 16 | 0.63 | 53 | 39 |