




Features

- Metalized polypropylene film capacitor.
- Rated voltage 275Vac (UL, cUL 250V).
- Compact size.
- IEC/EN 60384-14 class X2.

Applications


- Designed mainly for suppressing noise occurring in power line of electrical appliances.

Dimensions

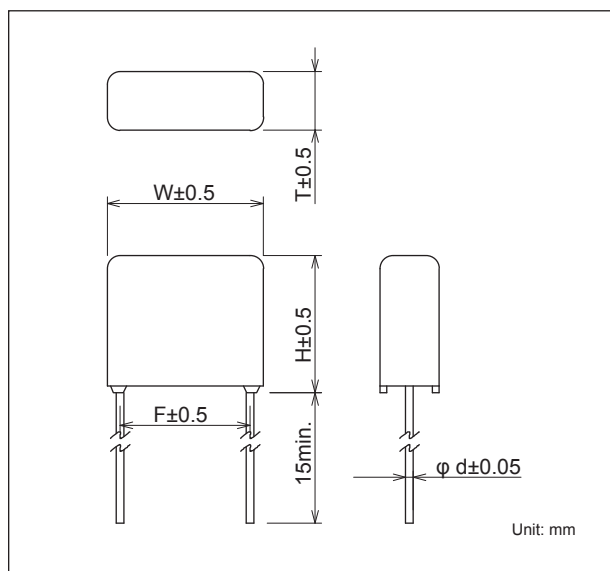


	Safety Standard	File No.
UL	:UL60384-14	E47474
cUL	:CSA E60384-14	E47474
ENEC	:IEC/EN60384-14	SE/0142-1

The "ENEC" mark is a common European product certification mark based on testing to harmonised European safety standard. The mark with #14 stands for SEMKO.

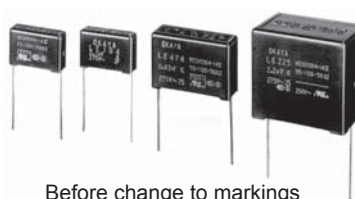


Before change to markings



After change to markings

Circuit



Model numbering system

L	E			
Series name	Capacitance			

Electrical Specifications

Rated Voltage **275Vac (UL, cUL: 250V)**

Safety Standard	Class	Model Number	Capacitance μF±10%	Dimensions					Dissipation Factor	Test Voltage	Insulation Resistance
				W	H	T	F	d			
c  US  	X2	LE103	0.01	12.0	10.5	4.5	10.0	0.6	C≤1μF 0.003max. (f=10kHz) C>1μF 0.002max. (f=1kHz)	Line to Line C≤2.2μF 1,250Vac 50/60Hz 60sec C=3.3μF 1,000Vac 50/60Hz 60sec	Line to Line 103~334 15,000MΩmin. 474~225 5,000Ω•Fmin.
		LE153	0.015								
		LE223	0.022								
		LE333	0.033								
		LE473	0.047	17.0	11.0	5.0	15.0				
		LE683	0.068								
		LE104	0.1								
		LE154	0.15								
		LE224	0.22								
		LE334	0.33	17.5	17.5	9.5	22.5	0.8			
		LE474	0.47								
		LE684	0.68	25.5	19.5	10.5				27.5	
		LE105	1.0								
		LE155	1.5	30.5	24.5	15.0				27.5	
		LE225	2.2								
		LE335	3.3	30.0	27.5	18.0					

Operating Temperature: -55~+100°C