


## Model PSC809

### Packard Connector and Cable Assembly

**Model PSC809** is a prefabricated cable and connector assembly. This assembly offers the users of Pressure Sensor Limited pressure transducers and transmitters fitted with the Packard Metri-Pack 150 series connector an easy turnkey solution to a cable interface transition. The cable assembly is fabricated from a flexible shielded three conductor 18 gauge cable. The cable assembly is rated from -20 to 75 deg C. The cable is terminated on one end by an industry standard 3 position Packard Electric Metri-Pack 150 series connector. The other end of the cable is bare flying leads stripped and pre solder tinned for use. The cable assembly is offered in various standard cable lengths. The cable assembly can also be custom configured in volumes with alternate terminations.

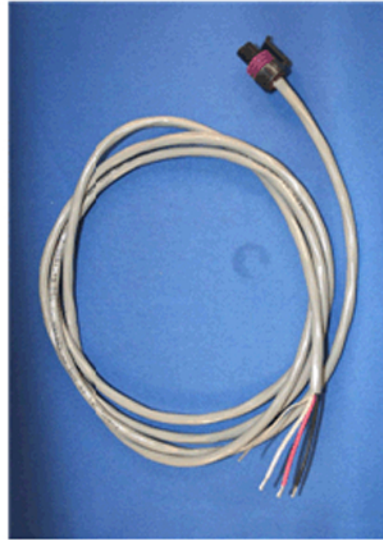

PSC809 Ordering Model No.: PSC809-X  
X

#### Cable Length

0 =	24.00" / 0.6m
1 =	39.37" / 1.0m
2 =	78.74" / 2.0m
3 =	118.00" / 3.0m
4 =	157.48" / 4.0m
5 =	196.85" / 5.0m
6 =	236.22" / 6.0m

The standard cable length is 24", length can be custom made.

