

## S-Series Displacement Transducers

Datasheet  
502686  
issue 7  
EDCR 18768

- <0.2% Linearity FSO
- 19mm Diameter Stainless Steel Body
- IP 65 or IP 67 Protection
- Improved measuring range to body length
- AC, DC, 4-20mA and Digital output versions
- Large Bore to core clearance
- Wide range of instruments & signal conditioning



The S-Series of Displacement Transducers is the culmination of many years of experience gained from Solartron Metrology's highly successful Mach One range plus careful note of market feedback. The result is a totally new range of transducers that is better able to satisfy today's demanding manufacturing and research applications.

The need to transfer signals from the transducer to data acquisition and control systems reliably, quickly and cost effectively has been catered for with a complete new range of onboard or external analogue signal conditioning units and Orbit® compatible modules for Digital versions.

The Stainless Steel body with improved sealing options of IP65 or IP67, coupled with new polymer guides with rigid carriers, ensure that the transducers keep working accurately and reliably, especially in wet or corrosive conditions.

An unusually large bore to core clearance is maintained throughout the range, even on transducers fitted with onboard signal conditioning, enabling easier installation and making the assembly more forgiving of misalignment.

| Measuring range<br>(total travel mm) |                 |         |         |                |          |                 |      |    |       |        |             |            |   |   |
|--------------------------------------|-----------------|---------|---------|----------------|----------|-----------------|------|----|-------|--------|-------------|------------|---|---|
|                                      |                 | S IP 65 | S IP 67 | SR Submersible | SR IP 68 | Axial Connector | LVDT | DC | Orbit | 4-20mA | Screw Mount | High Temp' |   |   |
|                                      | 5               | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 10              | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 15              | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 20              | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 30              | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 50              | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 100             | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 150             | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 200             | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | 300             | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
| Mechanical                           | Axial connector | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | Free Core       | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | Guided core     | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | Screw Mount     | ▲       | ▲       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | High Temp,      | ●       | ■       | ●              | ●        | ●               | ●    | ●  | ●     | ■      | ●           | ●          | ● | ● |
| Display/Controller                   | SI 1000         | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | SI 3000         | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | SI 7000         | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ■      | ●           | ■          | ● | ● |
| Remote<br>signal conditioning        | DRC             | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | OD 2            | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | OD 4            | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | OD 5            | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | BICM (15-0-15V) | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | BICM (24V)      | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |
|                                      | TTL module      | ▲       | ▲       | ▲              | ▲        | ▲               | ▲    | ▲  | ▲     | ▲      | ▲           | ▲          | ▲ | ▲ |
|                                      | Orbit           | ●       | ●       | ●              | ●        | ●               | ●    | ●  | ●     | ●      | ●           | ●          | ● | ● |

●

Compatible

▲

Refer to E Engineering

■

Not Available

Note! High Temperature  
is for Transducers only

|   |                      |
|---|----------------------|
| ● | Compatible           |
| ▲ | Refer to Engineering |
| ■ | Not Available        |

Note! High Temperature  
is for Transducers only

## measuring range in mm

|                 |         |         |         |        |        |        |        |        |         |         |
|-----------------|---------|---------|---------|--------|--------|--------|--------|--------|---------|---------|
| LVDI            | +/- 2.5 | +/- 5.0 | +/- 7.5 | +/- 10 | +/- 15 | +/- 25 | +/- 50 | +/- 75 | +/- 100 | +/- 150 |
| DC/DC & 4-20 mA | 0-5     | 0-10    | 0-15    | 0-20   | 0-30   | 0-50   | 0-100  | 0-150  | 0-200   | 0-300   |
| Digital         | 0-5     | 0-10    | 0-15    | 0-20   | 0-30   | 0-50   | 0-100  | 0-150  | 0-200   | 0-300   |
| Linearity FSO   | 0.2     |         |         |        |        |        |        |        |         | 0.25    |

|                                    |      |      |      |      |      |      |      |      |      |      |
|------------------------------------|------|------|------|------|------|------|------|------|------|------|
| <b>Electrical LVDI</b>             |      |      |      |      |      |      |      |      |      |      |
| Sensitivity (mV/V/mm) $\pm$ 5%     | 145  | 179  | 121  | 76   | 60   | 21.5 | 15   | 10.5 | 6.9  | 3.9  |
| 3V RMS at 5.0kHz into 100k ohm     | 1.0  | 2.6  | 2.2  | 0.6  | 1.5  | 0.5  | 0.6  | 2.5  | 1.65 | 1.83 |
| Energising current (mA/V) $\pm$ 5% | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Residual Voltage at null (%FSO)    |      |      |      |      |      |      |      |      |      |      |


|                                      |        |
|--------------------------------------|--------|
| <b>Electrical DC/DC &amp; 4-20mA</b> |        |
| Input Voltage (DC)                   | 10-30V |
| Output ripple (%FSO)                 | 0.02   |
| Bandwidth Hz (-3dB)                  | 500    |

|                           |                                |
|---------------------------|--------------------------------|
| <b>Electrical Digital</b> |                                |
| Reading rate              | Up to 3906 readings per second |
| Bandwidth                 | Up to 460 Hz                   |
| Output                    | Solartron Orbit Protocol       |

|                           |                          |
|---------------------------|--------------------------|
| <b>Mechanical Options</b> |                          |
| Guided core               | see<br>ordering<br>guide |
| Spring return             |                          |
| Connectors                |                          |
| Extra cable               |                          |
| Universal Joints          |                          |
| Output options            |                          |
| +/- 5 Vdc                 |                          |
| +/- 10 Vdc                |                          |
| 0-5 V dc                  |                          |
| 5-0 V dc                  |                          |
| 0-10 V dc                 |                          |
| 10-0 V dc                 |                          |
| 4-20 mA                   |                          |
| 20-4 mA                   |                          |

|                                             |                                    |
|---------------------------------------------|------------------------------------|
| <b>Environmental (transducer only)</b>      |                                    |
| Storage temperature LVDI                    | -40°C to +120°C                    |
| Storage temperature DC/DC & 4-20mA          | -20°C to +85°C                     |
| Operating temperature LVDI                  | -40°C to +120°C                    |
| Operating temperature DC/DC & 4-20mA        | 0°C to +65°C                       |
| Operating temperature Digital* (probe only) | -40°C to +120°C                    |
| Sealing                                     | IP 67 or IP 65                     |
| temperature coefficient (%FSO/°C).          |                                    |
| <02 for +/-2.5mm.                           | <.015 rest of range                |
| Shock                                       | Drop test 1m onto hard surface     |
|                                             | topple test x 10 onto hard surface |
| Vibration                                   | Sinusoidal Amplitude               |
|                                             | 10 to 50Hz 1-10 grms linear        |
|                                             | 50 to 1kHz 10 grms                 |

|                 |                            |
|-----------------|----------------------------|
| <b>Material</b> |                            |
| Body            | 316 series Stainless Steel |
| Core            | Nickel/Iron                |
| Cable           | FEP                        |

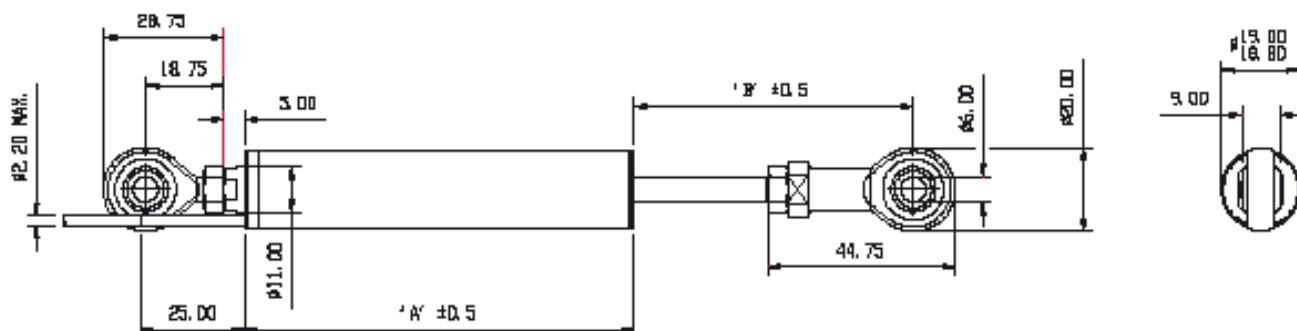


#### Guided with Universal Joints

| A/C      | 'A' mm<br>Body length | 'B1' mm<br>Fully<br>Extended | 'B2' mm<br>At null | 'B3' mm<br>Retracted |
|----------|-----------------------|------------------------------|--------------------|----------------------|
| ± 2.5 mm | 55                    | 53.25                        | 49.5               | 45.4                 |
| ± 5 mm   | 74.5                  | 64.25                        | 57                 | 49.4                 |
| ± 7.5mm  | 81.7                  | 68.25                        | 59.9               | 51.2                 |
| ± 10 mm  | 96                    | 79.25                        | 66.8               | 53.9                 |
| ± 15 mm  | 110.4                 | 97.25                        | 76.3               | 55                   |
| ± 25 mm  | 131.9                 | 120.25                       | 89.1               | 57.5                 |
| ± 50 mm  | 189.5                 | 178.25                       | 124                | 69.4                 |
| ± 75 mm  | 239.7                 | 249.25                       | 169.9              | 90.2                 |
| ± 100 mm | 297.2                 | 309.23                       | 201.18             | 93.08                |
| ± 150 mm | 412                   | 475                          | 309.5              | 141.73               |

#### DC/DC & 4-20 mA

|        |       |        |        |        |
|--------|-------|--------|--------|--------|
| 5 mm   | 94    | 53.25  | 49.5   | 45.4   |
| 10 mm  | 113.5 | 64.25  | 57     | 49.4   |
| 15 mm  | 120.7 | 68.25  | 59.9   | 51.2   |
| 20 mm  | 135   | 79.25  | 66.8   | 53.9   |
| 30 mm  | 149.4 | 97.25  | 76.3   | 55     |
| 50 mm  | 170.9 | 120.25 | 89.1   | 57.5   |
| 100 mm | 228.5 | 178.25 | 124    | 69.4   |
| 150mm  | 278.7 | 249.25 | 169.9  | 90.2   |
| 200mm  | 336.2 | 309.23 | 201.18 | 93.08  |
| 300 mm | 450.9 | 475    | 309.5  | 141.73 |

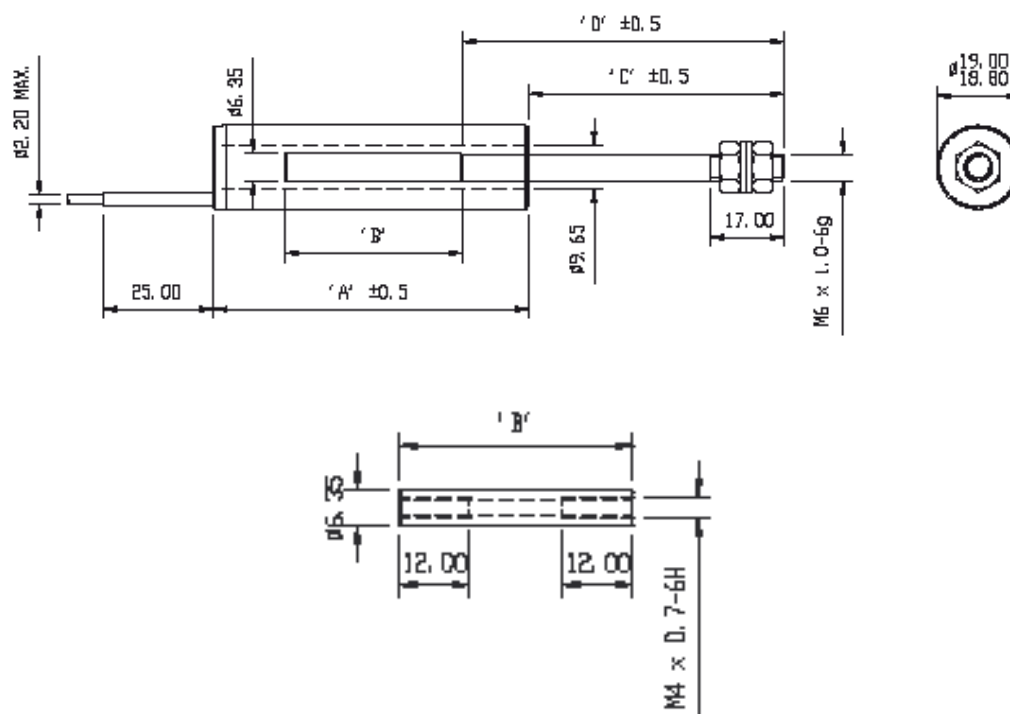


### Free Core & Free Core with Carrier

| A/C      | 'A' mm<br>body length | 'B' mm<br>core length | 'C' mm<br>at null | D' mm |
|----------|-----------------------|-----------------------|-------------------|-------|
| ± 2.5 mm | 33.5                  | 16.5                  | 40.5              | 47    |
| ± 5 mm   | 53                    | 29                    | 48                | 58    |
| ± 7.5mm  | 60.2                  | 34                    | 50.9              | 62    |
| ± 10 mm  | 74.5                  | 40                    | 57.75             | 73    |
| ± 15 mm  | 88.9                  | 37.5                  | 67.3              | 91    |
| ± 25 mm  | 110.4                 | 38.5                  | 80.05             | 114   |
| ± 50 mm  | 168                   | 50                    | 115               | 172   |
| ± 75 mm  | 218.2                 | 50                    | 160.9             | 243   |
| ± 100 mm | 275.7                 | 50                    | 192.15            | 303   |
| ± 150 mm | 390.5                 | 50                    | 300.72            | 469   |

## DC/DC & 4-20 mA


|        |       |      |        |     |
|--------|-------|------|--------|-----|
| 5 mm   | 72.5  | 16.5 | 40.5   | 47  |
| 10 mm  | 92    | 29   | 48     | 58  |
| 15 mm  | 99.2  | 34   | 50.9   | 62  |
| 20 mm  | 113.5 | 40   | 57.75  | 73  |
| 30 mm  | 127.9 | 37.5 | 67.3   | 91  |
| 50 mm  | 149.4 | 38.5 | 80.05  | 114 |
| 100 mm | 207   | 50   | 115    | 172 |
| 150mm  | 257.2 | 50   | 160.9  | 243 |
| 200mm  | 314.7 | 50   | 192.15 | 303 |
| 300 mm | 429.5 | 50   | 300.72 | 469 |

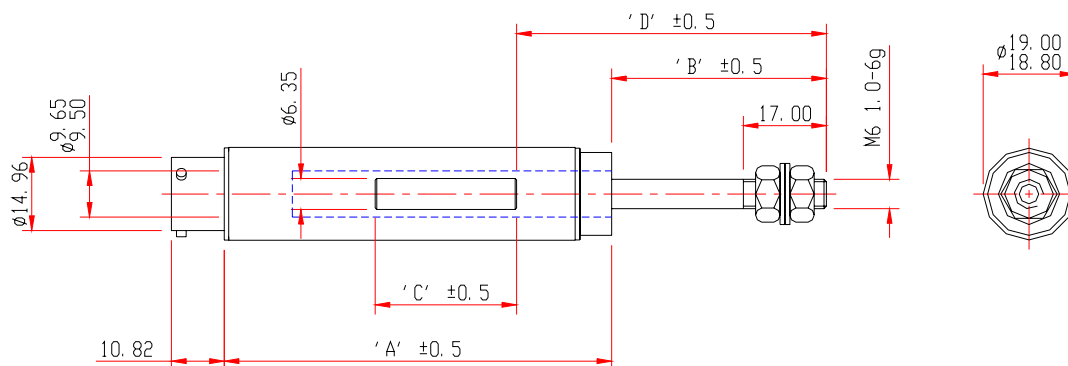

S Series Axial - Free Core & Carrier

| Transducer Type     | 'A' mm<br>Body Length | 'B' mm<br>At Null | 'C' mm<br>Core Length | 'D' mm |
|---------------------|-----------------------|-------------------|-----------------------|--------|
| Free Core & Carrier |                       |                   |                       |        |
| AC Version          |                       |                   |                       |        |
| ± 2.5mm             | 60.40                 | 39.10             | 16.50                 | 56.50  |
| ± 5mm               | 79.40                 | 46.50             | 29.00                 | 67.50  |
| ± 7.5mm             | 86.40                 | 49.40             | 34.00                 | 71.50  |
| ± 10mm              | 101.40                | 56.30             | 40.00                 | 82.50  |
| ± 15mm              | 116.40                | 65.80             | 37.50                 | 100.50 |
| ± 25mm              | 137.40                | 78.60             | 38.50                 | 123.50 |
| ± 50mm              | 194.40                | 113.60            | 50.00                 | 181.50 |
| ± 75mm              | 245.40                | 159.50            | 50.00                 | 252.50 |
| ± 100mm             | 301.40                | 190.70            | 50.00                 | 312.50 |
| ± 150mm             | 416.40                | 299.30            | 50.00                 | 478.50 |
| Free Core & Carrier |                       |                   |                       |        |
| DC/DC and 4-20mA    |                       |                   |                       |        |
| 5mm                 | 93.40                 | 39.10             | 16.50                 | 56.50  |
| 10mm                | 110.40                | 46.50             | 29.00                 | 67.50  |
| 15mm                | 119.90                | 49.40             | 34.00                 | 71.50  |
| 20mm                | 134.40                | 56.30             | 40.00                 | 82.50  |
| 30mm                | 148.40                | 65.80             | 37.50                 | 100.50 |
| 50mm                | 170.40                | 78.60             | 38.50                 | 123.50 |
| 100mm               | 227.40                | 113.60            | 50.00                 | 181.50 |
| 150mm               | 278.40                | 159.50            | 50.00                 | 252.50 |
| 200mm               | 333.40                | 190.70            | 50.00                 | 312.50 |
| 300mm               | 448.30                | 299.30            | 50.00                 | 478.50 |






S Series Axial - Guided

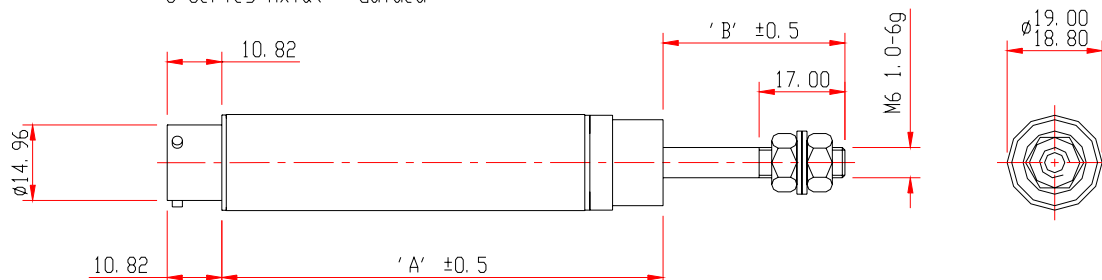

S Series Axial - Guided

| Transducer Type  | 'A' mm<br>Body Length | 'B1' mm<br>Extended | 'B2' mm<br>At Null | 'B' mm<br>Retracted |
|------------------|-----------------------|---------------------|--------------------|---------------------|
| Guided           |                       |                     |                    |                     |
| AC and Digital   |                       |                     |                    |                     |
| ± 2.5mm          | 68.40                 | 40.60               | 32.60              | 27.60               |
| ± 5mm            | 87.40                 | 51.00               | 40.00              | 30.50               |
| ± 7.5mm          | 94.40                 | 55.00               | 42.90              | 32.40               |
| ± 10mm           | 109.40                | 66.00               | 49.80              | 35.00               |
| ± 15mm           | 124.40                | 84.00               | 59.30              | 36.10               |
| ± 25mm           | 145.40                | 107.00              | 72.10              | 38.60               |
| ± 50mm           | 202.40                | 165.00              | 107.10             | 50.70               |
| ± 75mm           | 253.40                | 236.00              | 153.00             | 71.40               |
| ± 100mm          | 309.40                | 296.00              | 184.20             | 73.90               |
| ± 150mm          | 424.40                | 462.00              | 292.80             | 125.00              |
| Guided           |                       |                     |                    |                     |
| DC/DC and 4-20mA |                       |                     |                    |                     |
| 5mm              | 101.40                | 40.60               | 32.60              | 23.00               |
| 10mm             | 118.40                | 51.00               | 40.00              | 29.00               |
| 15mm             | 127.90                | 55.00               | 42.90              | 30.80               |
| 20mm             | 142.40                | 66.00               | 49.80              | 33.50               |
| 30mm             | 156.40                | 84.00               | 59.30              | 34.60               |
| 50mm             | 178.40                | 107.00              | 72.10              | 37.60               |
| 100mm            | 235.40                | 165.00              | 107.10             | 49.10               |
| 150mm            | 286.40                | 236.00              | 153.00             | 69.90               |
| 200mm            | 341.40                | 296.00              | 184.20             | 72.40               |
| 300mm            | 456.30                | 462.00              | 292.80             | 123.50              |

## Also Available at Solartron Metrology



**Introducing Your Partners:**  
*Taking the lead time out of Solartron Gage Probes.*

**Steven Rushing**  
Component Distributors Inc.  
Sales Engineer  
Phone: 224-234-3926  
Email: [steven.rushing@cdiweb.com](mailto:steven.rushing@cdiweb.com)

**Visit:**

[www.cdiweb.com/manufacture/solartron](http://www.cdiweb.com/manufacture/solartron)