



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com


Product Specifications Approval Sheet

Product Description: SAW Resonator 1033.333 MHz SMD 3.8X3.8 mm

TST Part No.: TC0556A

Customer Part No.: _____

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: _____ Jimmy Han 

Approved by: _____ Francis Chen 

Date: _____ 2010/12/02

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Resonator 1033.333 MHz

MODEL NO.: TC0556A

REV. NO.: 1.0

A. FEATURES:

1. 1-Port Resonator.

B. MAXIMUM RATING:

1. Input Power Level: 10 dBm
2. DC voltage: 3 V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C


C. ELECTRICAL CHARACTERISTICS:

Characteristic	Units	Minimum	Typical	Maximum
Center frequency Fr	MHz	1033.283	1033.333	1033.383
Insertion Loss IL	dB	-	1.5	2.0
Equivalent Elements				
Motional capacitance C1	fF	-	1.25	-
Motional inductance L1	μH	-	19	-
Motional resistance R1	Ohm	-	15	-
Parallel capacitance Co	pF	-	2.3	-
Temp. coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	5	20	35
Package size		SMD 3.8X3.8X1.4mm		


RoHS Compliant
Lead free
Lead-free soldering

D. EQUIVIRENT CIRCUIT:

One-Port Resonator:

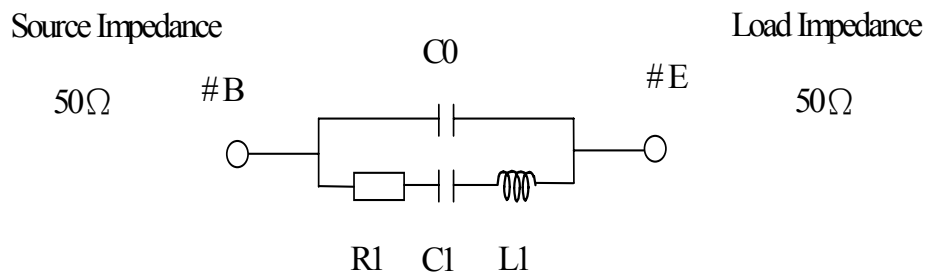


E. OUTLINE DRAWING:

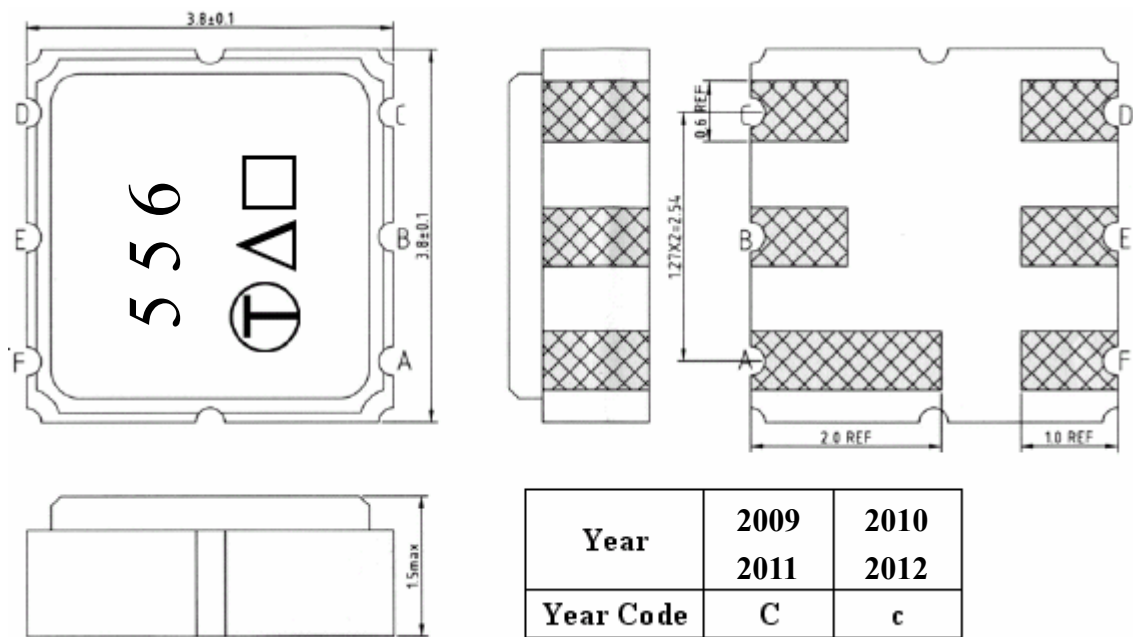


- #E : Input or Output
- #B : Output or Input
- #A、C、D、F : Ground
- Δ : Year Code
- : Data Code(Follow the table provided by planer each year)


F. FREQUENCY CHARACTERISTICS

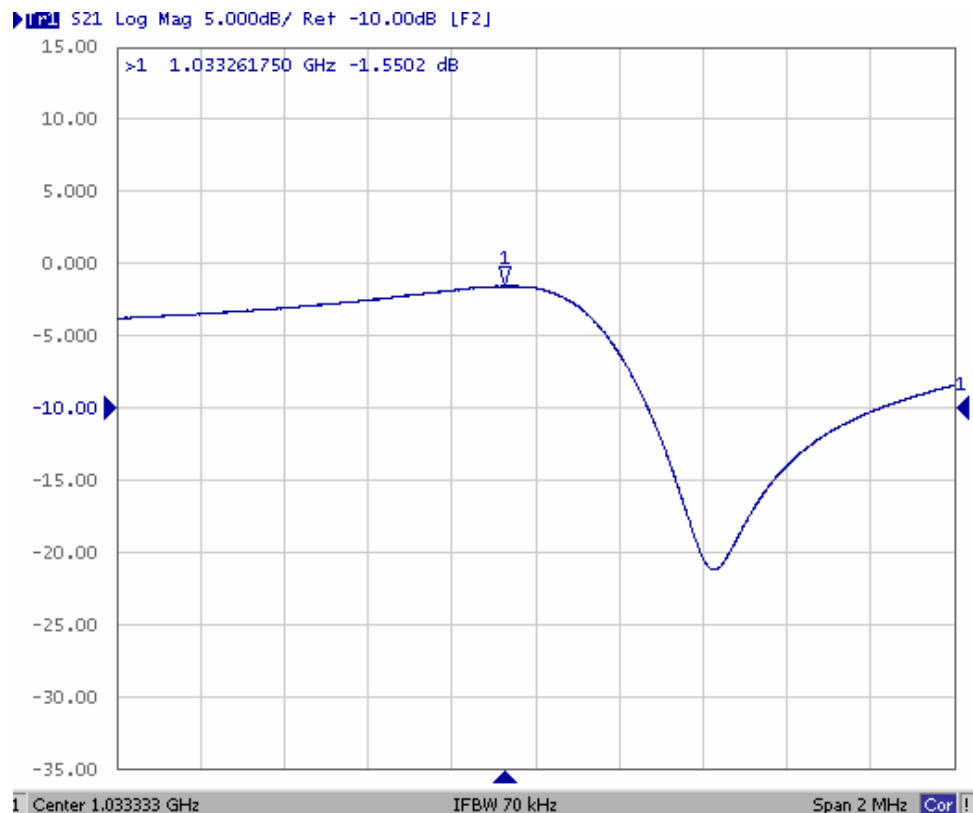

G. TEST CIRCUIT:

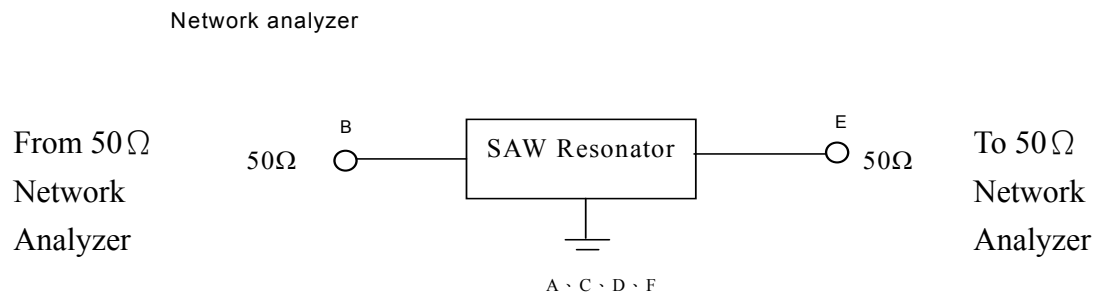


H. LAND PATTERN:

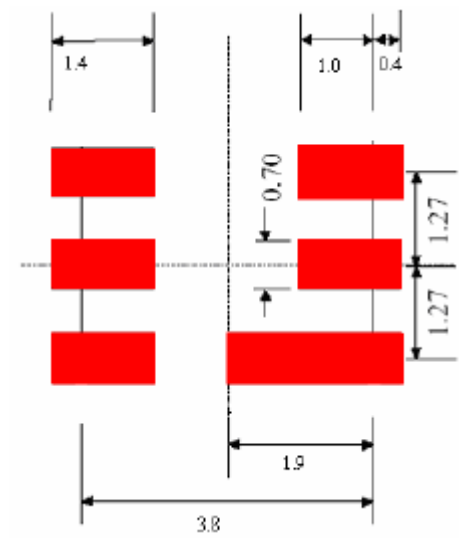


I. PACKING:

1. REEL DIMENSION

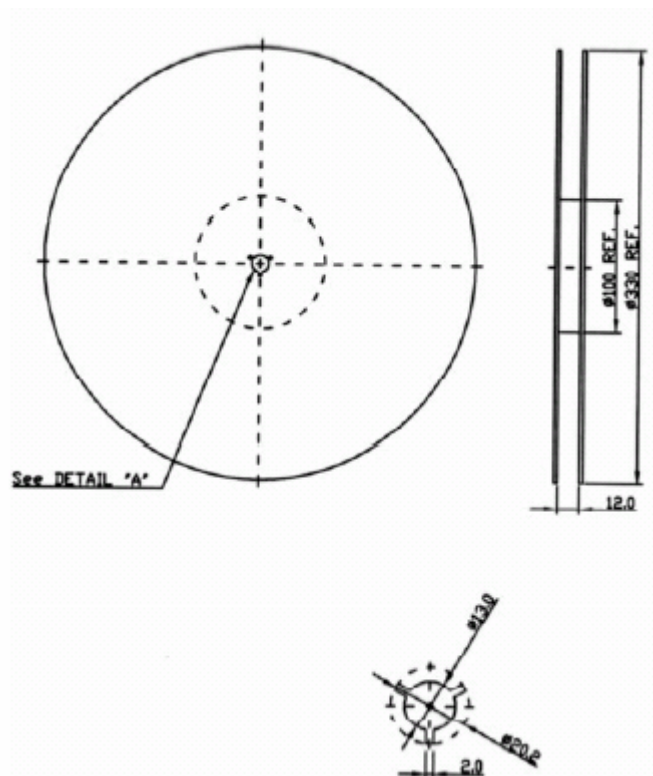

2. TAPE DIMENSION

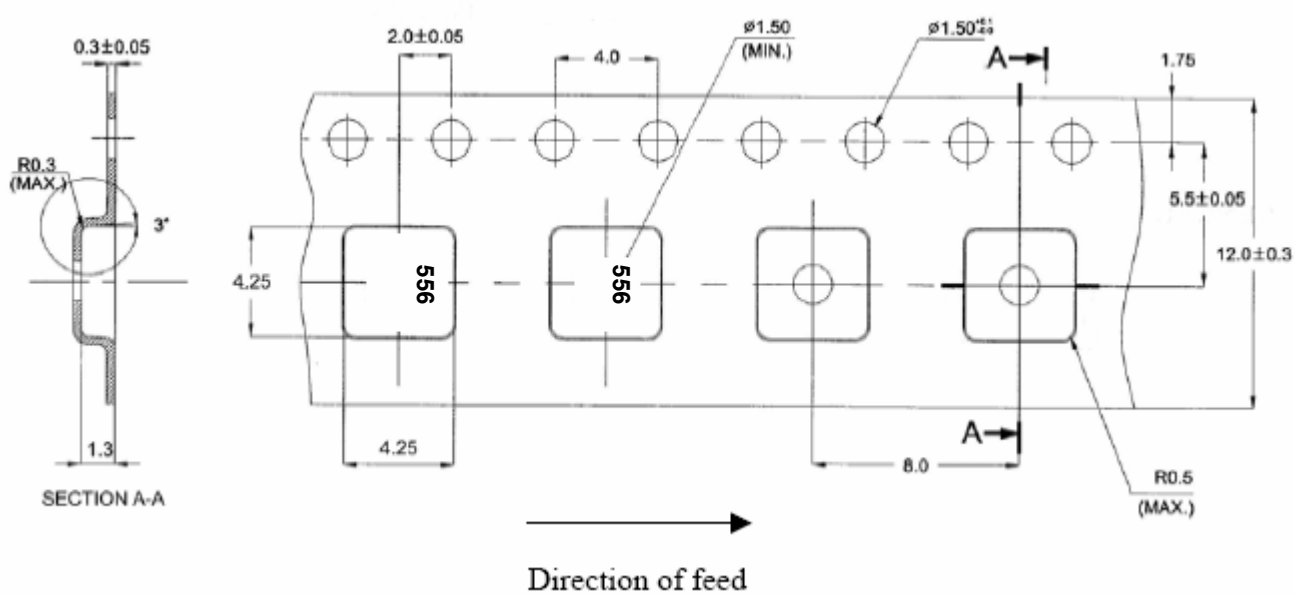

J. RECOMMENDED REFLOW PROFILE:

