

ML SERIES

SPECIFICATIONS

- ✦ **Non-contact micromasurement level/distance**
- ✦ **$\pm 0.0075"$ (± 0.19 mm) accuracy**
- ✦ **No contact with material**
- ✦ **Miniature size, fits anywhere**

The Measurement Specialties ML Series Precision Micromasurement System uses very small sensor (VSS) technology to fit into those applications where ultrasonic sensors could not previously be used. The smaller size of the sensor enables the ML system to be used with autosamplers, robotic samplers, titration equipment, microsampling devices and test tube racks. The ML system performs high speed, multipoint, non-contact ultrasonic measurements with an accuracy of $\pm 0.0075"$ (± 0.19 mm). Many operational settings are programmable through a serial port, allowing for application specific customization. A choice of 4-20 mA, 0-10 VDC or RS-232 output is available. Ultrasound has a number of advantages over other systems available since measurements are not affected by liquid color (or lack of color) and there is no physical contact with the liquid so no disturbance of the sample occurs.

FEATURES

- ✦ Operating Range: 0.5 to 5" (12.7 to 127mm), consult factory for longer ranges
- ✦ Vessel / tube opening (diameter) as small as 1/8" (3.2 mm)
- ✦ Non-contact, ultrasonic operation eliminates contamination of sample media, while maintaining high system throughput
- ✦ No calibration or special installation requirements
- ✦ PC Compatible
- ✦ Measurements are not affected by liquid color, density, opacity
- ✦ Fast response time – Programmable
- ✦ Standard Accuracy $\pm 0.0075"$ (± 0.19 mm)

APPLICATIONS

- ✦ Adhesive Application
- ✦ Auto Sampler
- ✦ Bottle Filling
- ✦ Dimensional Profiling
- ✦ Drum/Tote Level
- ✦ Fill Verification
- ✦ Machine Run-Out
- ✦ Material Thickness
- ✦ Robotic Arm Position
- ✦ Shapes/Profiling
- ✦ Valve/Tool Position
- ✦ Wafer Counting
- ✦ Wafer Profiling

PERFORMANCE SPECIFICATIONS

Parameter	Typical Value
Operating Range	0.5 to 5" (12.7 to 127mm),
Accuracy	$\pm 0.0075"$ (± 0.19 mm) or $\pm 0.1\%$ of measured range at constant room temperature.
Repeatability	$\pm 0.05\%$ of range
Temperature Compensation	Automatic over full operating range (optional)
Temperature Range	Sensor: -20 to 160°F (-29 to 71°C) Electronics: -20 to 160°F (-29 to 71°C)

Parameter	Typical Value
Input Power	24 VDC, 12 VDC
Output	Choice of 0-10 V, 4-20 mA, and RS-232 and alarm set point (ML-11) (See selection chart)
Channels	Single
Setpoints/ Sample	Programmable
Sample Rate	Programmable
Sensor Size	Outer diameter 0.25, See selection chart
Sensor Material	Epoxy with Teflon® sensor face
Cable Length	Available in lengths of 2, 5, 10, and 20 feet.

MECHANICAL DIMENSIONS in inches [mm]

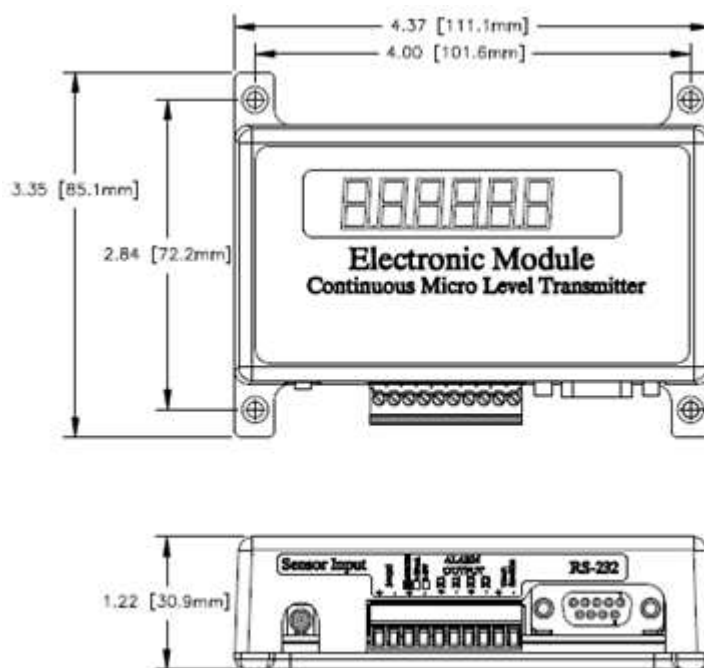


Figure 1: ML series elements electronic module

MECHANICAL DIMENSIONS IN INCHES [MM]

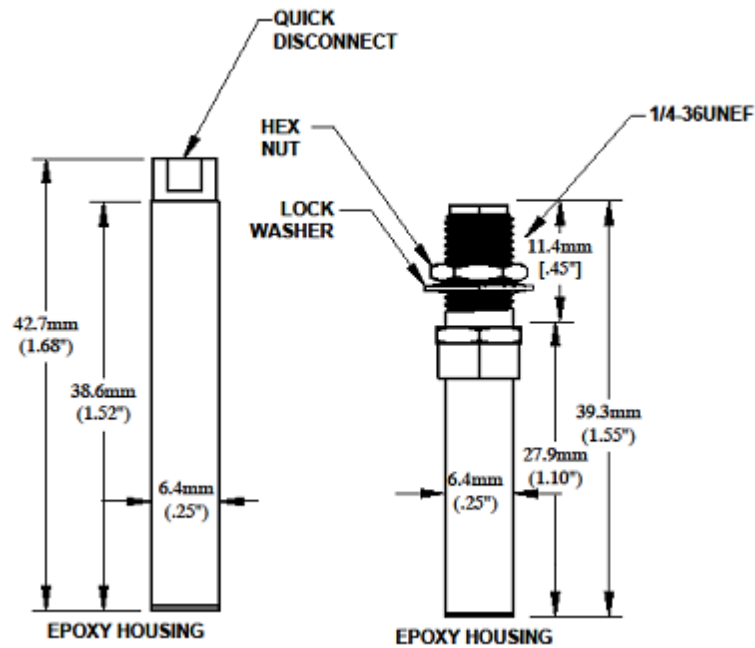


Figure 2: ML series elements sensors

APPLICATIONS

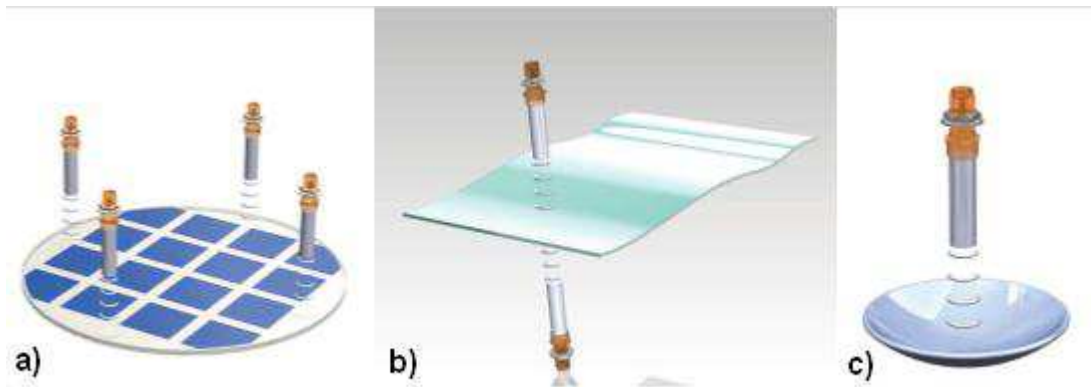


Figure 3: Applications of ML series elements; a) Semiconductor wafer profile, evenness, flatness, bow, warpage; b) Thickness measurement; c) Optics and contacts and lens thickness and curvature on-line inspection

ORDERING INFORMATION

Electronics, sensor, cable and temperature sensors are sold separately. Please submit separate part numbers.

A. Electronics

	Channels	Input Voltage	RS-232	Analog	Outputs Strobe in	Relays	Displays	Enclosure	Part Number
ML-01	1	24 VDC	X		X	2 relay		Nema 1	17608
ML-11	1	24 VDC	X	4-20mA		2 relay	X	Nema 1	17621
ML-11	1	24 VDC	X	0-10V		2 relay	X	Nema 1	17622
ML-11	1	24 VDC	X		X	2 relay	X	Nema 1	17623
ML-11	1	24 VDC	X	4-20mA		2 relay		Nema 1	17624
ML-11	1	24 VDC	X	0-10V		2 relay		Nema 1	17625

B. Sensor

Outer Diameter	Sensor Housing	Connection	Part Number
0.25"	Epoxy	Quick Disconnect	098-10001
0.25"	Epoxy	SMA	098-10060

C. Cable

Cable Type	Part Number*
Quick disconnect to SMB connection	CBL-Q1A0S2-XX
SMA to SMB connection	CBL-A2A0S2-XX

*Replace -XX in part number with the requested length in feet. Available lengths are 02, 05, 10, & 20 feet.

D. Temperature Sensor (if required)

Part	Part Number
Temperature sensor	076-10005

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Phone +1-800-522-6752
Email: customercare.hmp@te.com

EUROPE

MEAS Deutschland GmbH(Europe)
a TE Connectivity Company
Phone: +49-800-440-5100
Email: customercare.tlse@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Phone: +86-400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.