



COMPONENT DISTRIBUTORS, INC.
Since 1970
www.cdiweb.com

Distributing Tomorrow's Technologies For Today's Designs
Toll-Free: 1-800-777-7334



Model 3058 Accelerometer

Piezoresistive MEMS
DC Response
Millivolt Output
Integral Temp Compensation



The Model 3058 is a silicon MEMS accelerometer with integral temperature compensation. It is packaged on a ceramic substrate with a metal bracket which can be used to bolt the sensor to the mounting location. The accelerometer is offered in ranges from $\pm 2g$ to $\pm 100g$ range and provides a flat frequency response to minimum 1500Hz. The silicon MEMS sensor is gas damped and incorporates over-range stops for high-g shock protection.


For a similar accelerometer designed for adhesive mounting, see the model 3052.

FEATURES


- Bolt Mounted
- $\pm 1.0\%$ Non-Linearity
- 0 to $+50^\circ\text{C}$ Temp Compensation
- DC Response
- Gas Damping
- Built-in Overrange Stops
- Low Power Consumption

APPLICATIONS

- Vibration & Shock Monitoring
- Motion Control
- Impact & Shock Testing
- Transportation Measurements
- Embedded Applications
- Machinery

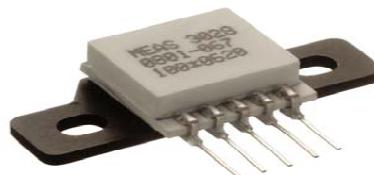

dimensions

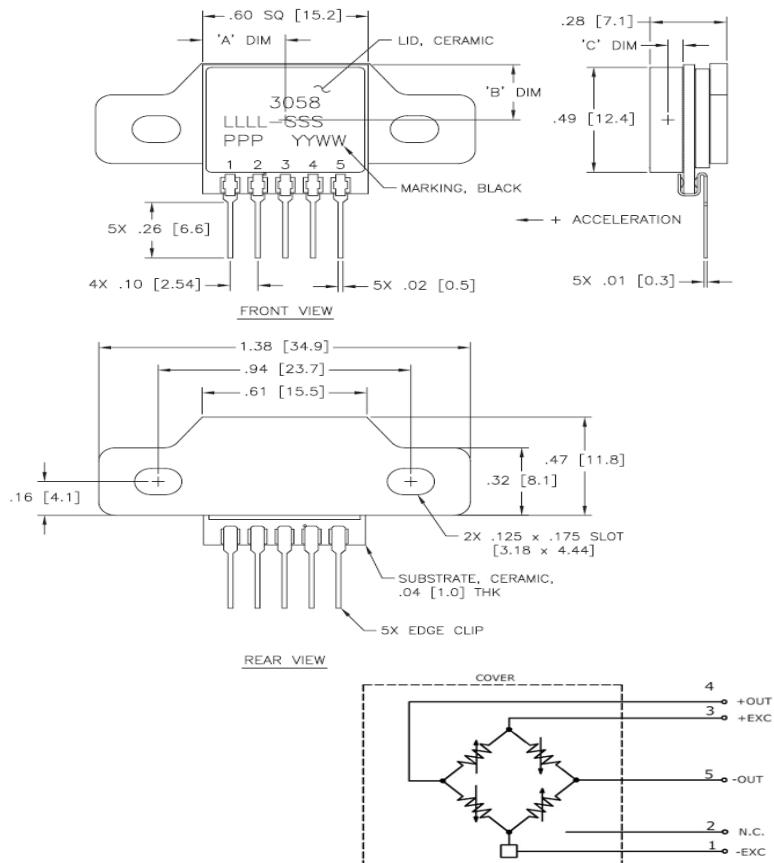



COMPONENT DISTRIBUTORS, INC.
Since 1970
www.cdiweb.com

Distributing Tomorrow's Technologies For Today's Designs

Toll-Free: 1-800-777-7334



Model 3058 Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1002 for Embedded DC Accelerometers.

Parameters

DYNAMIC

	±2	±5	±10	±20	±50	±100	Notes
Range (g)	5.0-9.0	2.4-3.6	1.2-1.8	0.6-0.9	0.24-0.36	0.12-0.18	@5Vdc Excitation
Sensitivity (mV/g) ¹	0-150	0-250	0-400	0-600	0-1000	0-1500	±5%
Frequency Response (Hz)	700	800	1000	1500	4000	6000	
Natural Frequency (Hz)							
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	
Shock Limit (g)	10000	10000	10000	10000	10000	10000	

ELECTRICAL

Zero Acceleration Output (mV)	±2	Differential
Excitation Voltage (Vdc)	2 to 10	
Output Resistance (Ω)	1900-6500	
Insulation Resistance (MΩ)	>100	
Residual Noise (µV RMS)	10	@50Vdc Maximum
Ground Isolation	Isolated from Mounting Surface	

ENVIRONMENTAL

Thermal Zero Shift (%FSO/°C)	±0.060
Thermal Sensitivity Shift (%/°C)	±0.060
Operating Temperature (°C)	-40 to +125
Compensated Temperature (°C)	0 to +50
Storage Temperature (°C)	-40 to +125
Humidity	Epoxy Sealed, IP61

PHYSICAL

Case Material	Aluminum Flange, Ceramic Cover
Weight (grams)	4.5
Mounting	2x #4-40 Mounting Screws
Mounting Torque	6 lb-in (0.7 N-m)

¹ Output is ratiometric to excitation voltage

Wiring color code: +Excitation = Pin 3; -Excitation = Pin 1; +Output = Pin 4; -Output = Pin 5; No Connection = Pin 2 (Pin 2 is used for trimming during assembly and should not be connected)

Calibration supplied: CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz

Optional accessories: 101 Three Channel DC Signal Conditioner Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

PART NUMBERING Model Number+Range+Electrical Connection

3058-GGG-P
 | |
 | | Electrical Connection (P=pins)
 | | Range (010 is 10g)

Example: 3058-010-P
 Model 3058, 10g, Pins

Model 3058 Rev A

www.meas-spec.com

09/13/2011

32 Journey Ste. 150 Aliso Viejo, CA 92656

949-716-5377

t&m@meas-spec.com