

Product Datasheet



The global certified BLD-040-C is a dual stage high efficiency smart LED driver. 10kV surge protection level, 100khour long life and 7-year warranty provide high confidence to luminaire users. It supports not only traditional 4-in-1 control, but also DALI2.0 and other smart protocols. NFC and cable programming are both available for users. All around protections including digital OTP (internal and external by NTC) with auto-recovery secure 24hour non-stop operation for luminaires.

☒ Street ☒ Flood ☒ Tunnel ☒ Shoe box ☒ Architectural



■ Features	2
■ Model List	2
■ Technical Data	3
■ Safety/EMC Compliance	4
■ Dimming	4
■ Programming	6
■ Lifetime vs. Case Temperature	8
■ Power Factor vs. Load	8
■ THD vs. Load	9
■ Efficiency vs. Load	9
■ Inrush Current	11
■ Dielectric Strength	11
■ Tc Point	12
■ Packaging Information	12
■ Mechanical Design	13
■ Output Operation Range	18
■ Revision History	20

40W, Isolated Dimming, NFC Programmable LED Driver

■ Features

- Supply Voltage: 90-305Vac or 127-420Vdc, 380Vac for 2 hours
- Great Surge Immunity 10kV
- -60DegC Cold Ambient Startup (Optional)
- 100,000Hour Life @ Tc=75°C & 7 Year Warranty @ Tc<=75°C
- +/-2% Output Current Accuracy
- Airset™ NFC Programmability
- Isolated 0-10V/PWM/Time/DALI2.0/DMX/RDM Dimmable
- Dim Off with 0.5W Standby Power (Model Depending)
- 12V 300mA Auxiliary Power to Power Controllers and Fans
- Class II Model Available
- UL Class P, Class 2
- ENEC/CB/CCC SELV Output
- Global Certified Model Available
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 62384

■ Model List

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max	
BLD-040-C070-XYZ	90 ~ 305 Vac	40 W	34-80Vdc	500mA	700mA	
BLD-040-C105-XYZ	90 ~ 305 Vac	40 W	23-57Vdc	700mA	1050mA	
BLD-040-C140-XYZ	90 ~ 305 Vac	40 W	17-38Vdc	1050mA	1400mA	
XY=	Dimming Method	Programmable	12Vaux	Dim-off		
NN	-	-	-	-		
DN	0-10V/PWM/Time	Cable	-	No Dim-off as default status, programmed to have Dim-off		
EN	0-10V/PWM/Time	Cable	300mA	√		
TR	Time/Set Current	NFC Wireless	-	-		
DR	0-10V/PWM/Time	NFC Wireless	-	No Dim-off as default status, programmed to have Dim-off		
ER	0-10V/PWM/Time	NFC Wireless	300mA	√		
AR	DALI2.0	NFC Wireless	-	√		
MR	DMX512 + RDM	NFC Wireless	-	√		
Z=	U	V	S	S-GLB000	W	D
Input Cable	3 pin UL cable with ground	3 pin UL cable with ground	3 pin VDE cable with ground	3 pin Global cable with ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Output Cable	2 pin UL cable without Ground	3 pin UL cable with ground	2 pin VDE cable without ground	2 pin Global cable with ground	3 pin VDE cable with ground	2 pin VDE cable without ground
Certified Input Voltage Range	UL Listed Class P FCC 120-277Vac	UL Listed Class P FCC 120-277Vac	ENEC CB RCM Class I 220-277Vac	UL Recognized 120-277Vac ENEC CB RCM Class I 220-277Vac	Class I 120-277Vac	ENEC CB Class II 220-277Vac

40W, Isolated Dimming, NFC Programmable LED Driver

■ Technical Data

Input Voltage	90~305Vac or 127V-420Vdc, 380Vac for 2 hours
Input Frequency	47~63Hz
Power Factor	>0.9@70-100%load, refer to PF vs. Load curve
THD	<15%@70-100%load, refer to THD vs. Load curve
Input Current	0.4Amax@120Vac & Full-Load, 0.22Amax@220Vac & Full-Load
Inrush Current	See Inrush Current Section in the datasheet
Leakage Current	0.75mIU max @277Vac 60Hz, UL8750 0.7mA max @240Vac 50/60Hz, IEC60598-1
Input Under Voltage	Shut down and auto-recovery
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±2%Io for programmable model, ±5%Io for non-programmable model
Ripple Current	Ip-p:5%Io max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	120% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \geq 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \leq 70 \pm 10^\circ\text{C}$
Auxiliary Power (Vaux)	12V+/-5%, 300mA max
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH~100%RH
MTBF	$\geq 320,000$ hours, 50°C case temperature (MIL-HDBK-217F)
Lifetime	$\geq 100,000$ hours, 75°C case temperature, refer to life vs. T_c curve
Case Temperature	90°C max, marked in the T_c point of label
Dimension	5.16x2.66x1.32 by inch (body), 6.22x2.66x1.32 by inch (endcaps included) 131.0x68.0x33.5 by mm (body), 158.0x68.0x33.5 by mm (endcaps included)
Net Weight	600g
Packing	See Package Information Section in the datasheet

Notes: Unless specified, all the test results are measured in 25°C room temperature.

40W, Isolated Dimming, NFC Programmable LED Driver

■ Safety/EMC Compliance

Safety Standards	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012/1310	Power units other than class 2 / Class 2 power units
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
IEC 62384	DC or AC supplied electronic control gear for LED modules - Performance requirements
IEC 55015/FCC Part 15	Conducted emission test & radiated emission test; ANSI C63.4:2009 Class B
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment



■ Dimming

Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	100uA	150uA	200uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Default Dim off Threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Default Dim off Threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		9V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
DALI Interface Standard	IEC62386, part 101,102,207		
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA
DMX+ & DMX- Voltage	-6V		6V
DMX to Ground Resistance	25Mohm		
Logic 0/1 (DMX+ to DMX-) Threshold		0.2V	
Communication Baud Rate		250kbps	

40W, Isolated Dimming, NFC Programmable LED Driver



- Default Dimming Curves

a. 0-10V dimming without dim-off

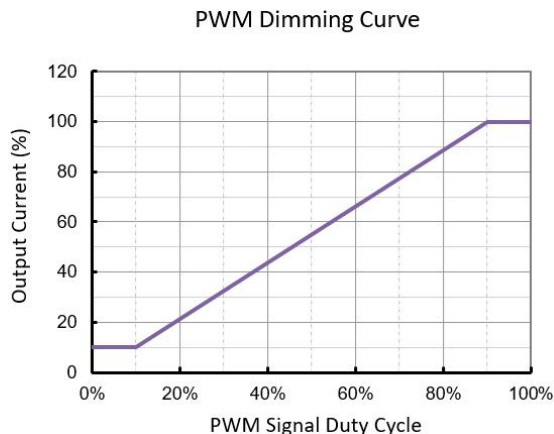
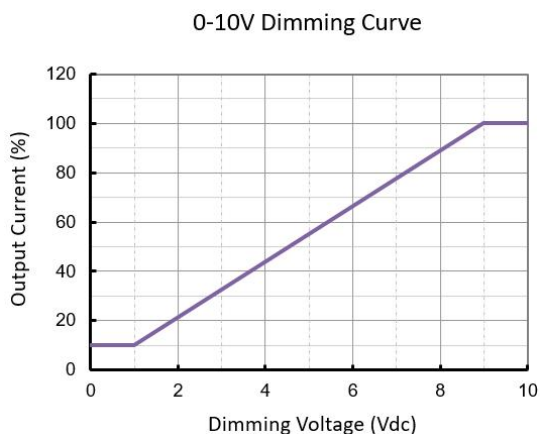


b. 0-10V dimming with dim-off

0-10V Dimming Curve with Dim Off

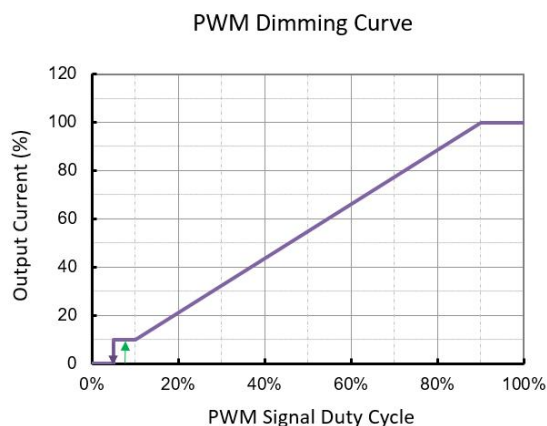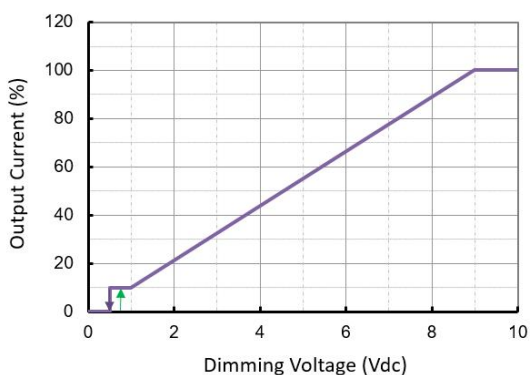

c. DALI and DMX dimming curves

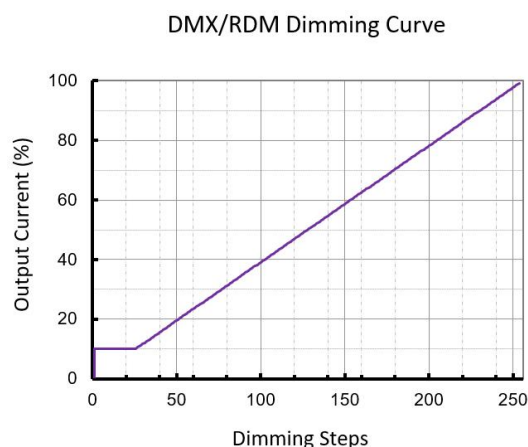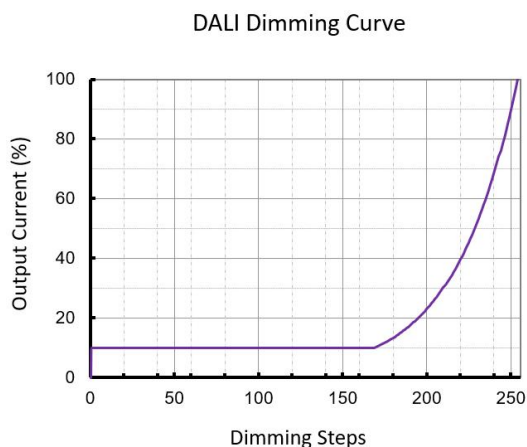


Note: Both DALI and DMX dimming curves can be customized to be linear or logarithmic as default.

40W, Isolated Dimming, NFC Programmable LED Driver

■ Programming

- Programmable Functions

uPowerTek LED drivers offer a range of configurable functions to meet specific lighting requirements. The Output Current, Dimming Mode, Dim Off/On Voltage Threshold, and Timer Dimming can be set as basic programming functions. Constant Lumen Output (CLO) can also be customized to ensure consistent light performance. Additionally, depending on the different product model numbers, users can benefit from programming Thermal Protection by external NTC (with extra cable), DALI/D4i Features, and DMX addressing.

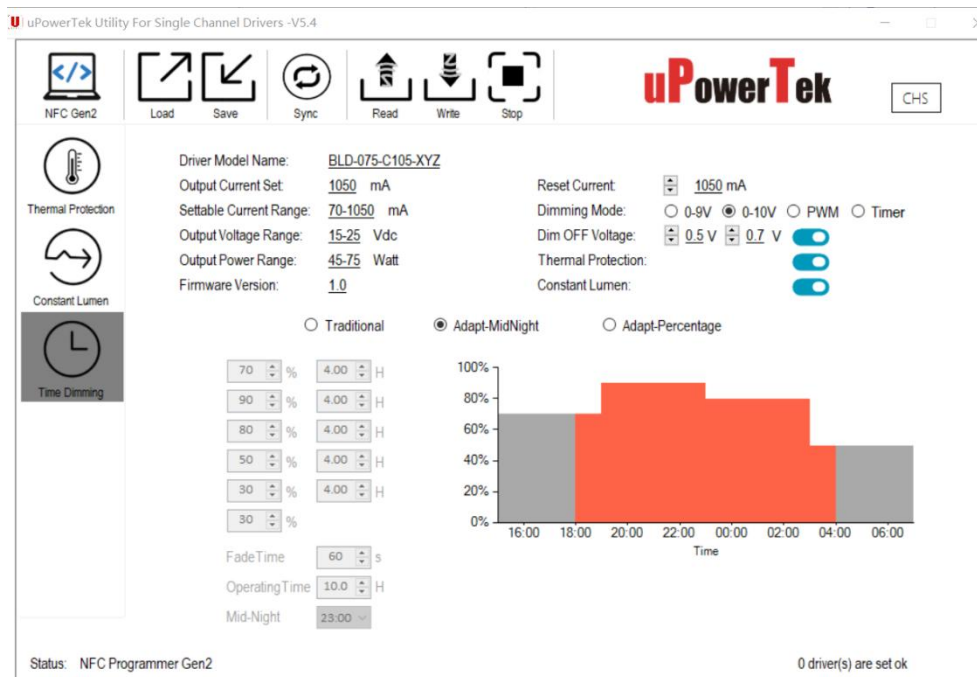

uPowreTek Programming Software Interface

- Required Equipment

To program uPowerTek LED drivers, users will need specific equipment based on their preferred method. For wired programming, the uPowerTek Cable Programmer is essential. For NFC wireless programming, users can use a smartphone with either IOS or Android, the uPowerTek NFC Programmer, or the FEIG NFC Programmers. These tools ensure a seamless and efficient setup process, realizing precise customization of the LED driver settings.



Cable Programmer



NFC Programmer V1



NFC Programmer V2



FEIG NFC Programmer




Android or iPhone

40W, Isolated Dimming, NFC Programmable LED Driver

- Connection Guide

This guide provides simple connection diagrams to help users understand the programming system. For more detailed operating instructions, including step-by-step procedures and additional configurations, please visit our website. You can download the comprehensive user manual and necessary software from the following link:

<https://www.upowertek.com/download-2/>.

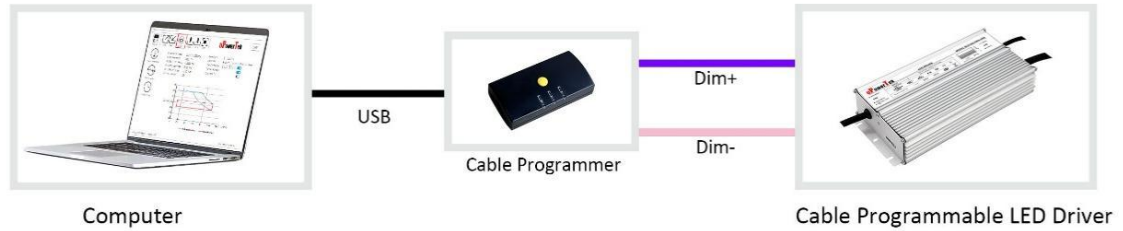

Wired Programming




Wireless Programming




Cellphone Programming

■ Lifetime vs. Case Temperature

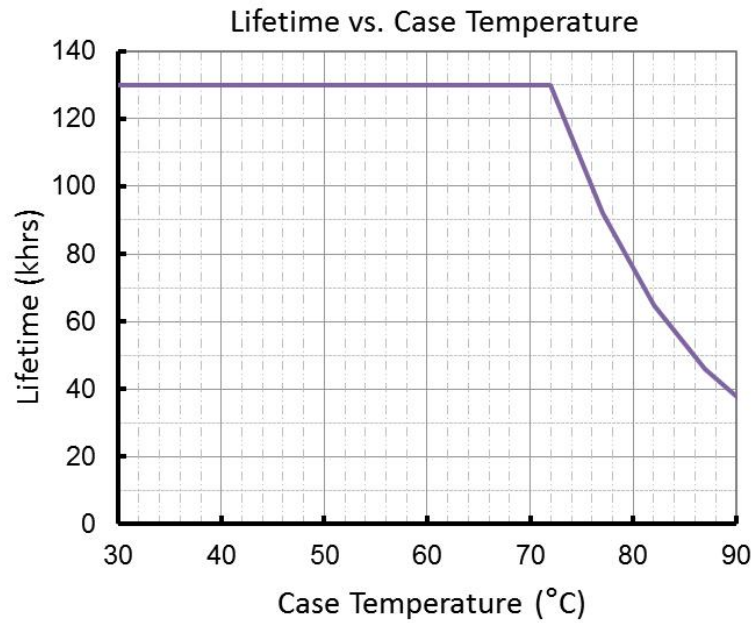


(End of Life: Maximum Failure Rate=10%)


■ Power Factor vs. Load

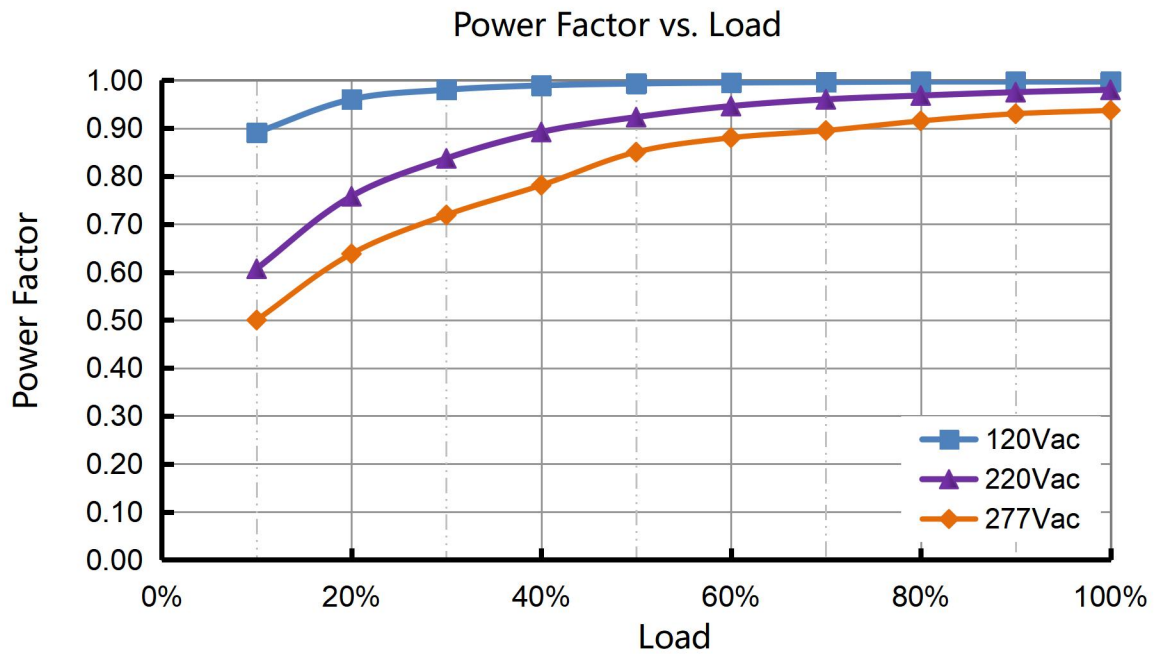


■ THD vs. Load

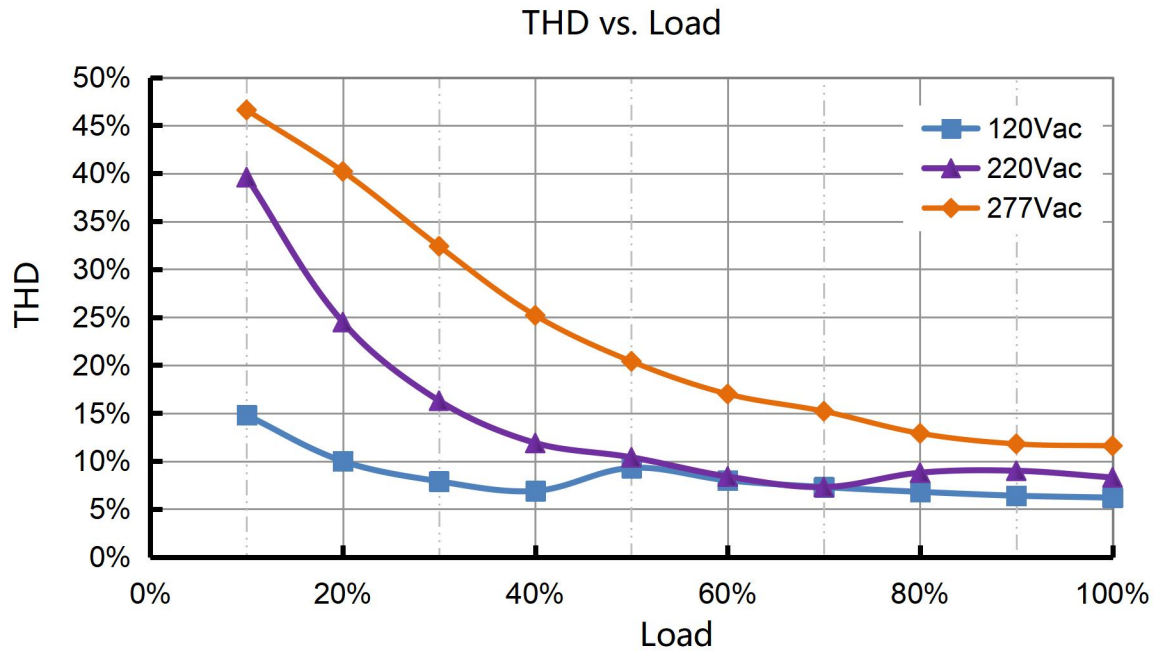


■ Efficiency vs. Load

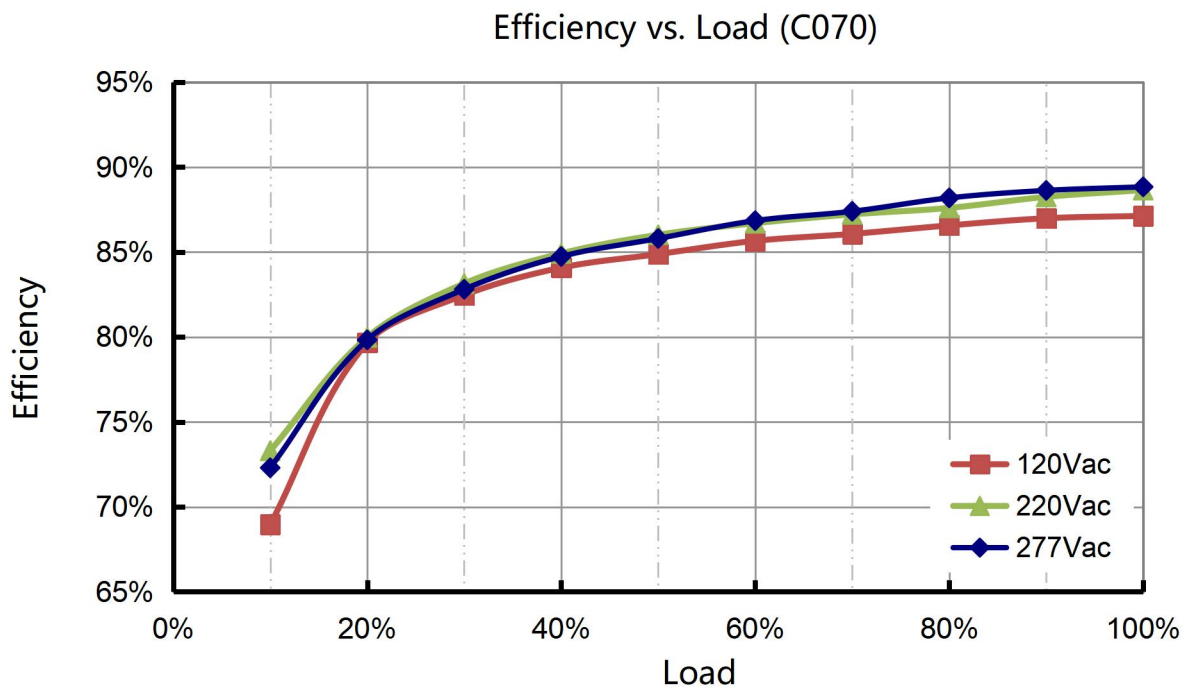


Efficiency vs. Load (C105)

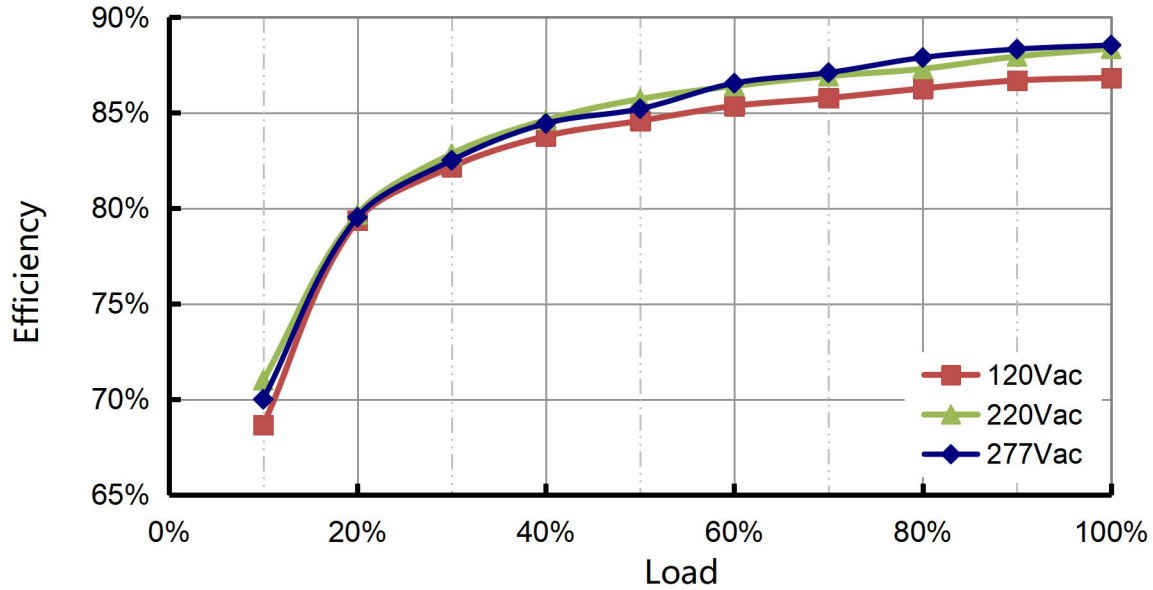

Efficiency vs. Load (C140)

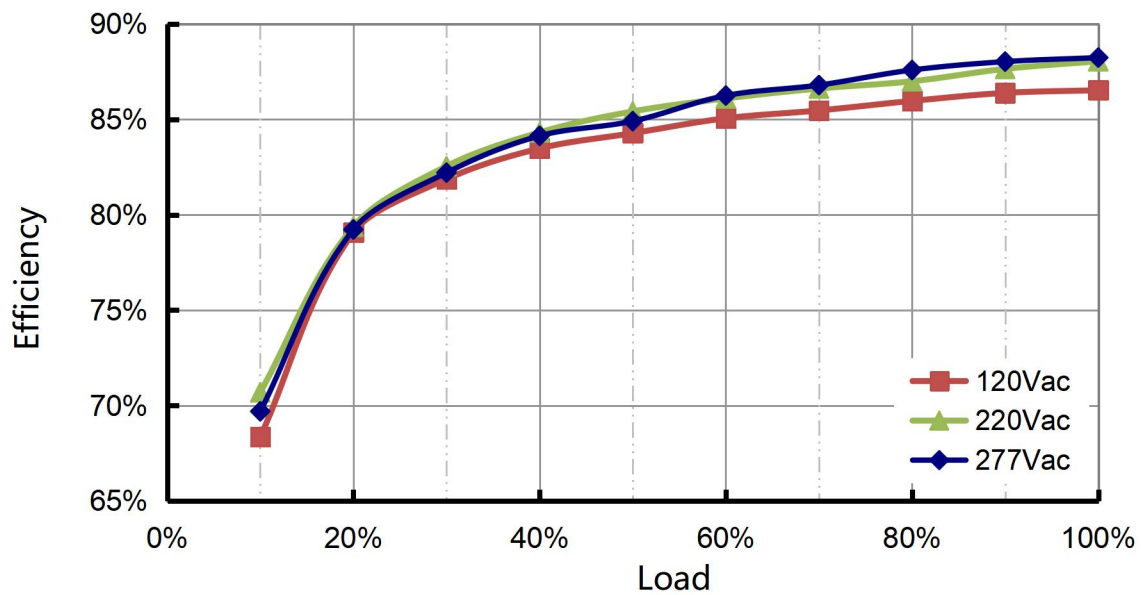

Inrush Current

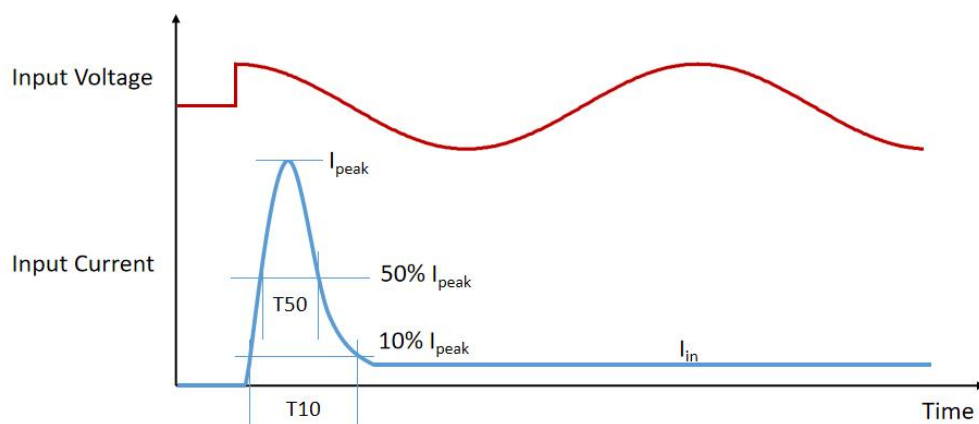

Input Voltage	I_{peak}	10% -10% T10 Duration	50% -50% T50 Duration
120Vac	37A	464μs	180μs
220Vac	66A	412μs	170μs
277Vac	90A	424μs	172μs

- MCB Suggestion

Type	B10	B16	B25	B32	C10	C16	C25	C32	D10	D16	D25	D32
Driver Quantity	7	11	18	23	12	19	30	38	24	38	60	77


Note: Calculated with MCB S200 series manufactured by ABB at 220Vac Input condition

Dielectric Strength

Unit: Vac	Input	Output	Dimming	Case
Input	-	3750	3750	1554
Output	3750	-	1554	1554
Dimming	3750	1554	-	1554
Case	1554	1554	1554	-


40W, Isolated Dimming, NFC Programmable LED Driver

■ Tc Point

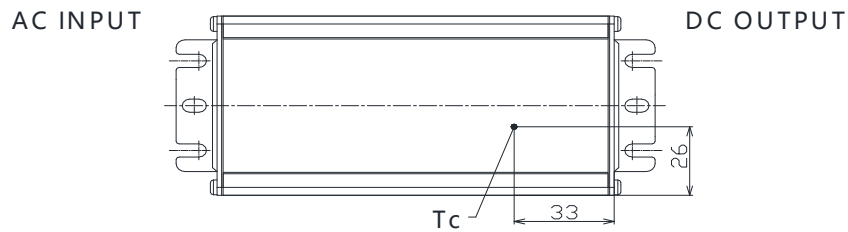

■ Packaging Information


Typical Carton Dimension(L×W×H)	490×280×150 mm
Positioning plate	3pcs/carton
Shield Board	1pcs/carton
LED Drivers/LED	15pcs/carton
Net Weight	9.0 kg/carton
Gross Weight	10.1 kg/carton

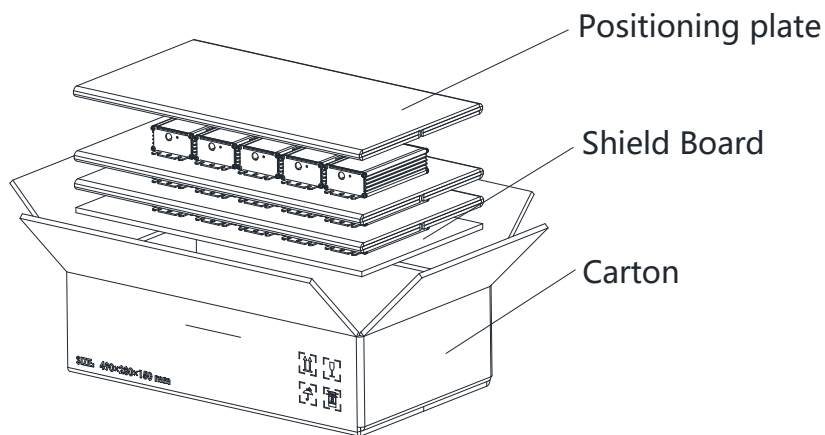


40W, Isolated Dimming, NFC Programmable LED Driver

■ Mechanical Design

- **BLD-040-Cxxx-NN/TRU (UL Cable)**

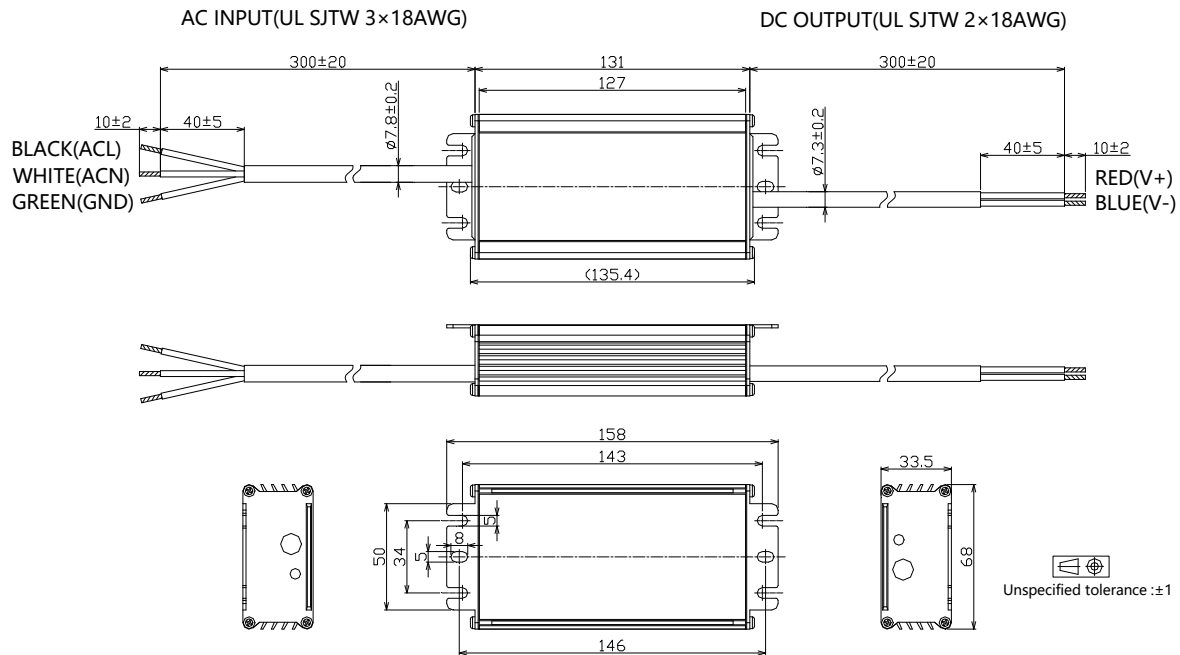


- **BLD-040-Cxxx-DN/DRU (UL Cable)**

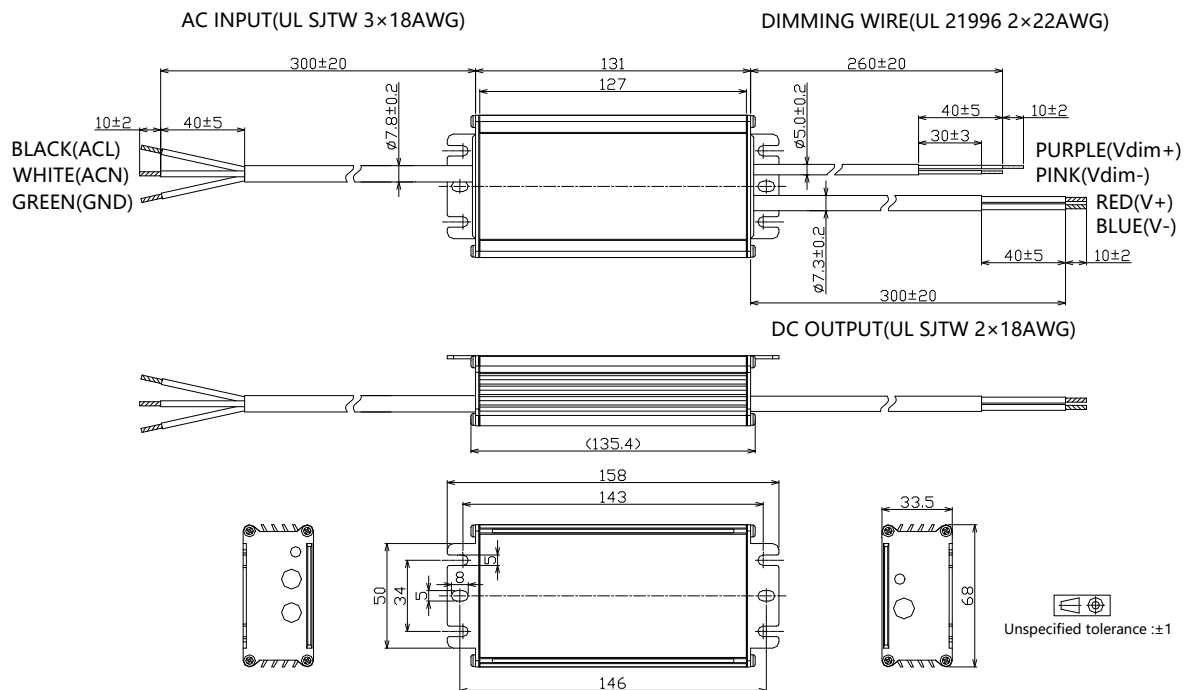


40W, Isolated Dimming, NFC Programmable LED Driver

- BLD-040-Cxxx-EN/ERU (UL Cable)

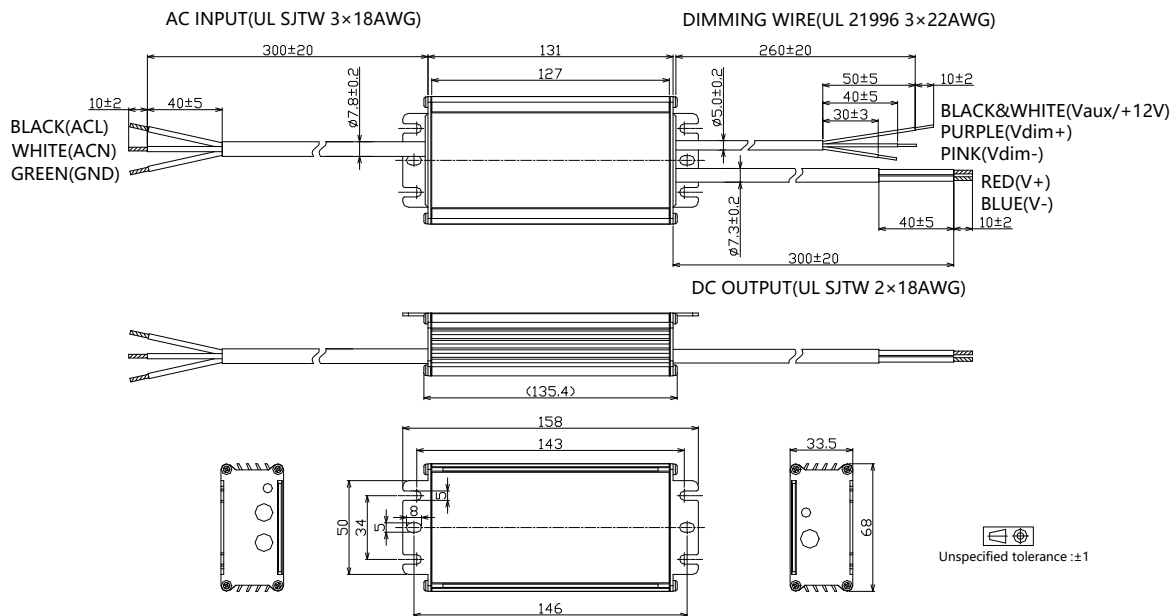


- BLD-040-Cxxx-ARU (UL Cable)

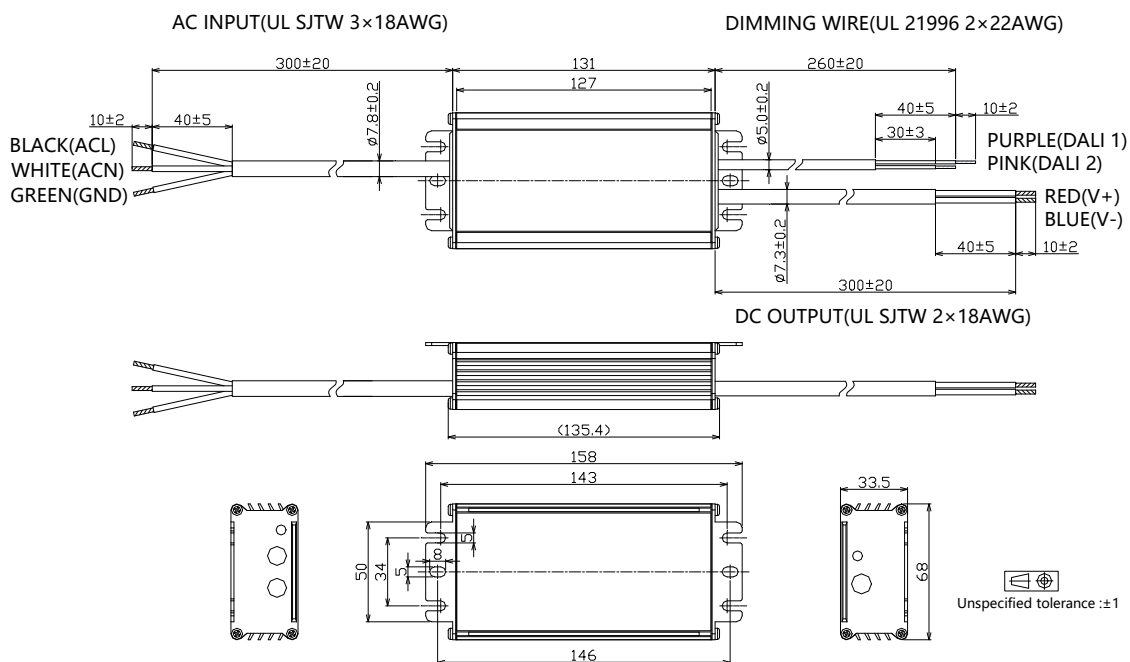


40W, Isolated Dimming, NFC Programmable LED Driver

- BLD-040-Cxxx-MRU (UL Cable)

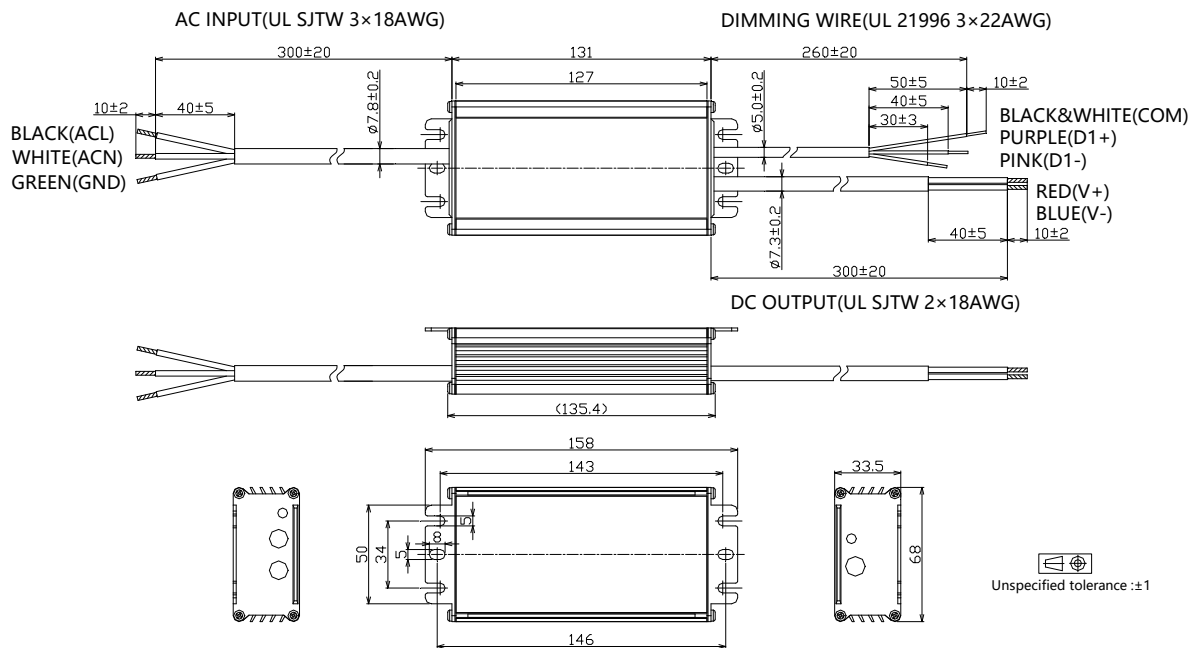


- BLD-040-Cxxx-NN/TRS (VDE Cable)

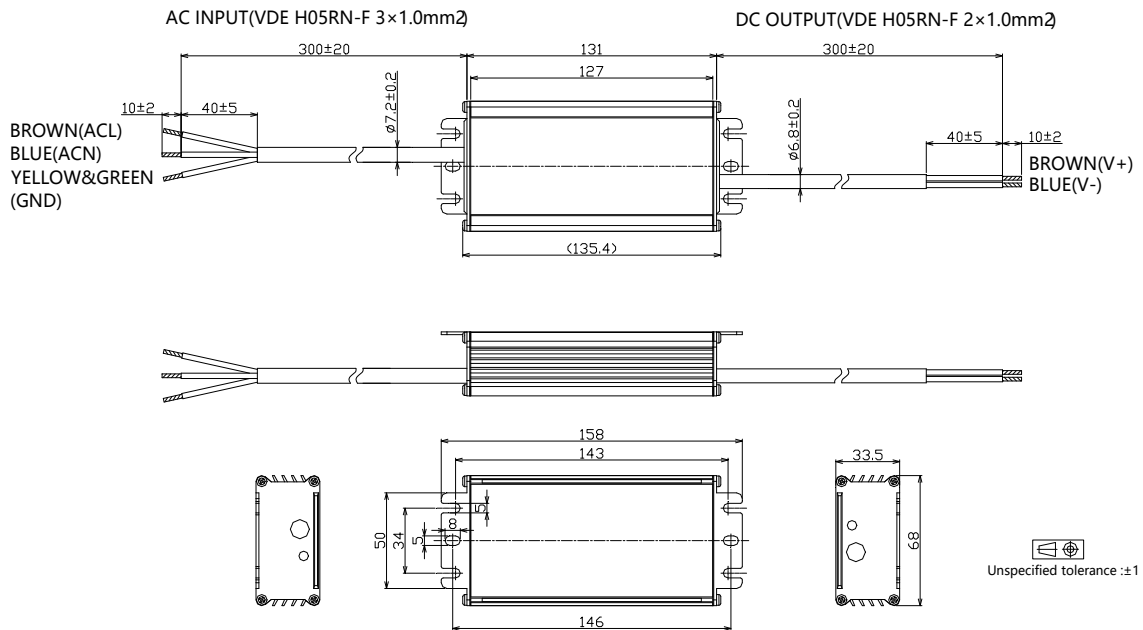


40W, Isolated Dimming, NFC Programmable LED Driver

- BLD-040-Cxxx-DN/DRS (VDE Cable)

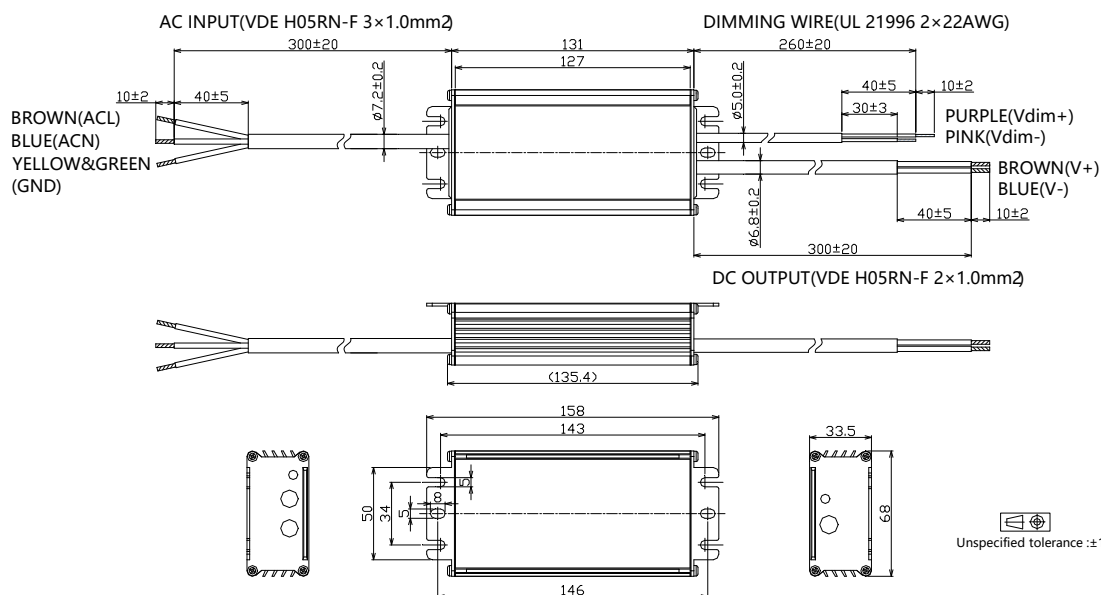


- BLD-040-Cxxx-EN/ERS (VDE Cable)

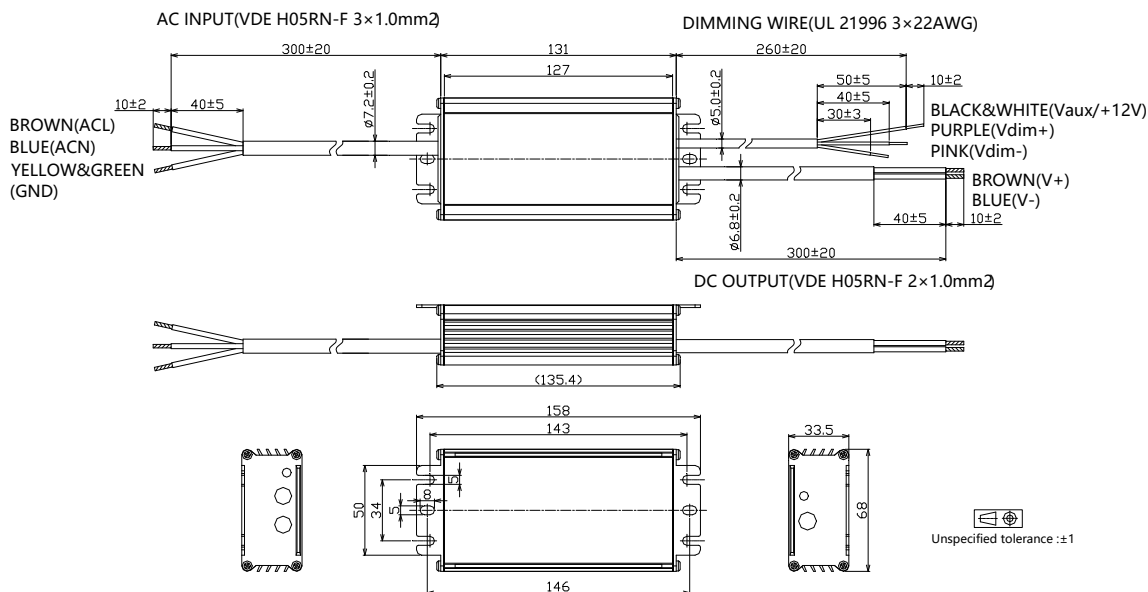


40W, Isolated Dimming, NFC Programmable LED Driver

- BLD-040-Cxxx-ARS (VDE Cable)

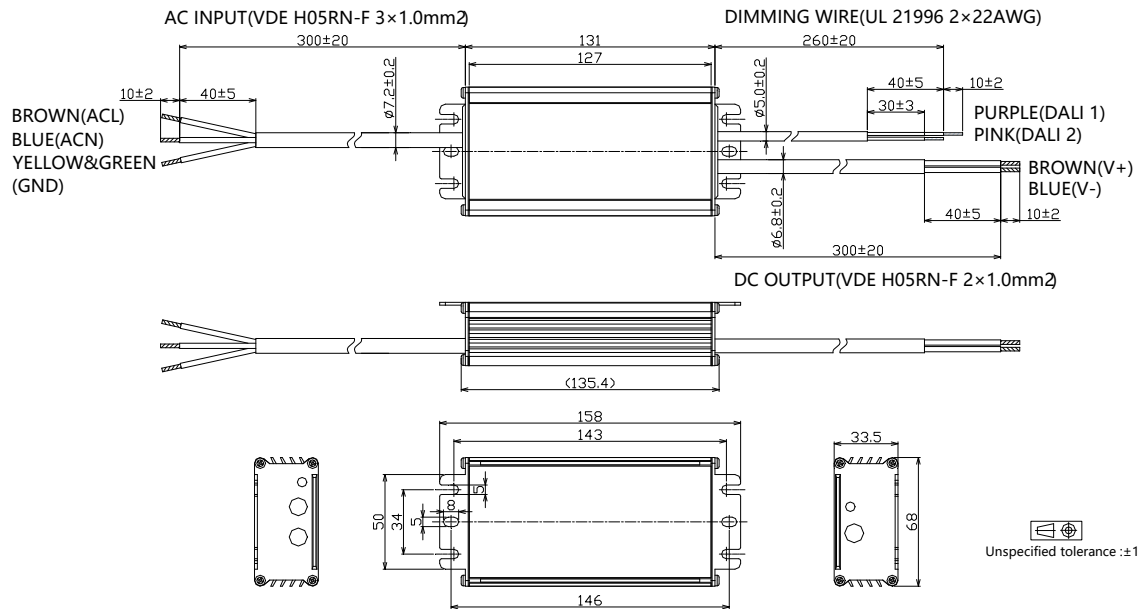

- BLD-040-Cxxx-MRS (VDE Cable)

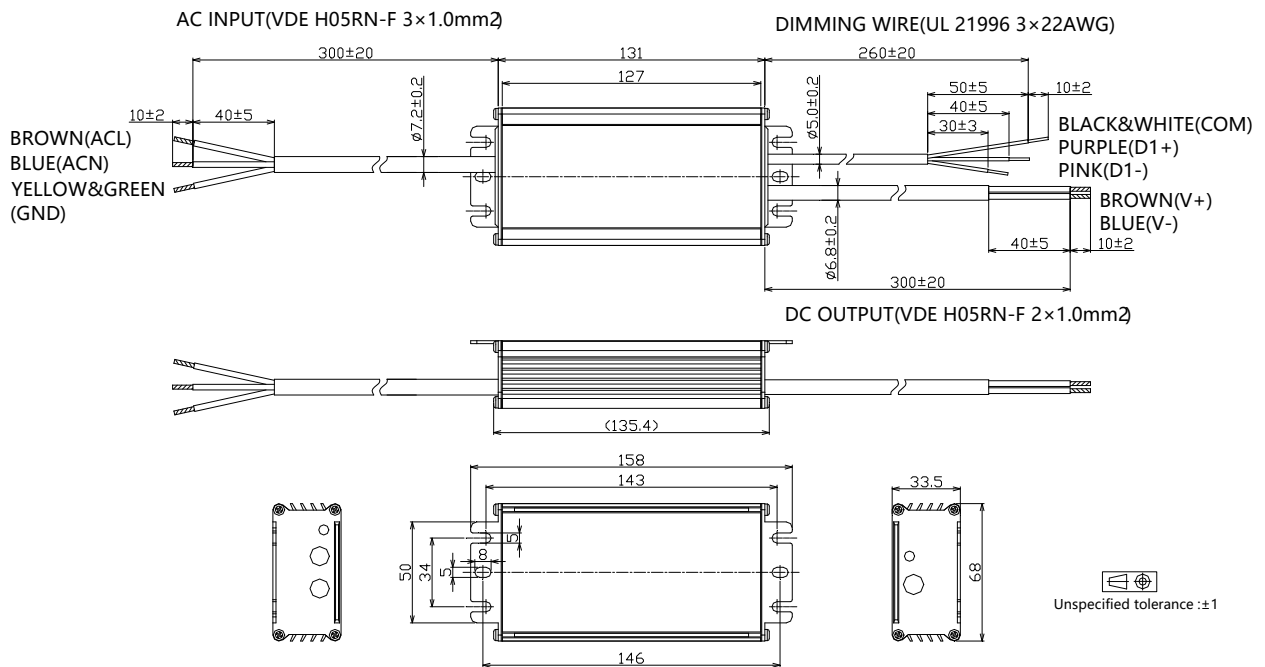

40W, Isolated Dimming, NFC Programmable LED Driver

■ Output Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C070	700	40	34	57	70
	650	40	37	62	65
	600	40	40	67	60
	550	40	44	73	55
	500	40	48	80	50
	450	36	48	80	50
	400	32	48	80	50
	350	28	48	80	50
	...	...	...	...	...
	50	4	48	80	50

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C105	1050	40	23	38	105
	1000	40	24	40	100
	950	40	25	42	95
	900	40	27	44	90
	850	40	28	47	85
	800	40	30	50	80
	750	40	32	53	75
	700	40	34	57	70
	650	37	34	57	70
	600	34	34	57	70
	550	31	34	57	70
	500	29	34	57	70
	...	...	...	...	...
	70	4	34	57	70

40W, Isolated Dimming, NFC Programmable LED Driver

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C140	1400	40	17	29	140
	1300	40	18	31	130
	1200	40	20	33	120
	1100	40	22	36	110
	1050	40	23	38	105
	1000	38	23	38	105
	950	36	23	38	105
	900	34	23	38	105
	850	32	23	38	105
	800	30	23	38	105
	750	29	23	38	105
	700	27	23	38	105
	...	...	...	...	...
	105	4	23	38	105

40W, Isolated Dimming, NFC Programmable LED Driver

■ Revision History

Revision	Date	Contents
D	2022-03-22	1. Index page added 2. Reduced dimming interface sourcing current 3. DALI 2.0 compatibility added 4. Programming instruction added 5. Inrush current data added 6. Tc point position indication added 7. Dielectric strength level added 8. Packaging information added 9. Mechanical design change with dimming cable color 10. Revision history added
E	2022-12-14	1. DMX dimmable models mechanical design updated
F	2023-07-14	1. Update cable selection table in Model List Section
G	2023-09-15	1. Update model selection table with -DN,-EN,DR models
H	2024-07-12	1. Fast dimming description added 2. Power factor, THD, efficiency curves updated by 10-100% load range 3. MCB usage and driver quantity section added 4. Inrush current data updated