






RL-2220 RLD-2220

PC MOUNT TRANSFORMERS

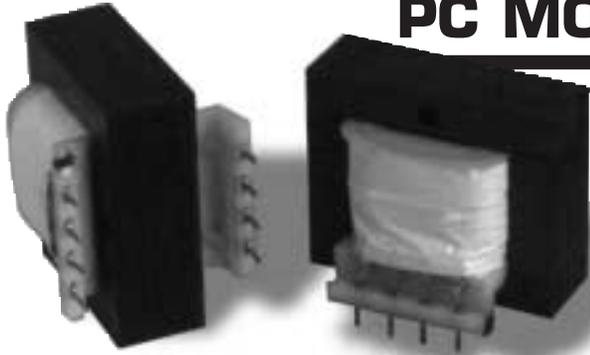

The RL-2220 and RLD-2220 Series of PC mount low power are designed to operate between 50 and 500Hz without any loss of output voltage. These transformers are available in ratings of 1.0VA, 1.2VA, 4.4VA, 10.0VA and 24.0VA. Single or dual primaries 50/500Hz and input range of (115V or 115/230V - 50/500Hz). Secondaries in series or parallel. Hipot tested at (1500VRMS). Manufactured to Class B insulation (130°C). Optional mounting brackets available see chart.

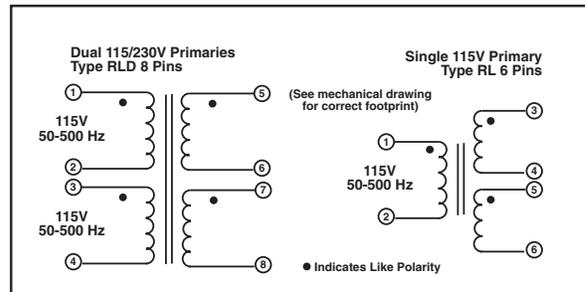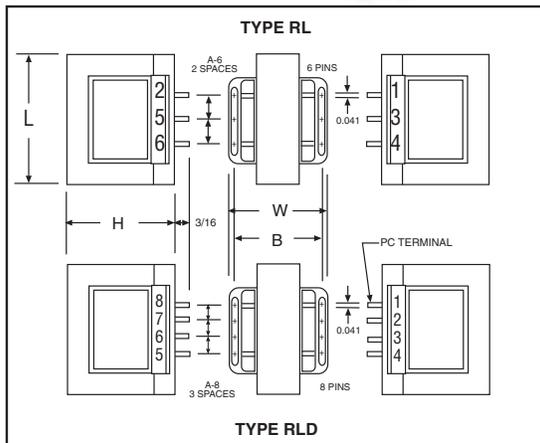

VA (Size)	L	W	H	A-6 (6Pin)	A-8 (8 Pin)	B	Wgt.	OPTIONAL BRACKET*		
								No.	MW	MD
1.0	1.00" 25.4mm	1.37" 34.92mm	0.83" 21.08mm	0.250" 6.35mm	0.200" 5.08mm	1.22" 31.2mm	2.5 oz. 0.07kg.	-	-	-
1.2	1.37" 34.8mm	1.12" 34.92mm	1.18" 30.15mm	0.312" 7.92mm	0.200" 5.08mm	1.030" 26.2mm	3 oz. 0.08kg.	-	-	-
4.4	1.62" 41.3mm	1.25" 31.8mm	1.37" 34.92mm	0.400" 10.16mm	0.250" 6.35mm	1.130" 28.7mm	5 oz. 0.14kg.	-	-	-
10.0	1.87" 47.6mm	1.43" 36.5mm	1.62" 41.27mm	0.400" 10.16mm	0.250" 6.35mm	1.330" 38.8mm	9 oz. 0.23kg.	10-BR	1.64" 41.7mm	1.12" 28.6mm
24.0	1.62" 41.3mm	2.25" 57.2mm	1.37" 34.93mm	0.400" 10.16mm	0.250" 6.35mm	2.130" 54.1mm	12 oz. 0.34kg.	24-BR	1.37" 34.9mm	2.00" 50.8mm

*An optional "Slide On" Mounting Bracket is available for sizes 10 & 24. The brackets do not use up any extra "Floor Space" but add 1/32" to the height of the transformer.



RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com

Primary 50/500 Hz		VA (Size)	Secondary RMS Rating	
Single 115V (6Pin)	Dual 115/230V (8 Pin)		Series	Parallel
RL-2220-10-90	RLD-2220-10-90	1.0	10VCT @ 90mA	5V @ 180mA
RL-2220-10-120	RLD-2220-10-120	1.2	10VCT @ 120mA	5V @ 240mA
RL-2220-10-440	RLD-2220-10-440	4.4	10VCT @ 440mA	5V @ 880mA
RL-2220-10-1000	RLD-2220-10-1000	10.0	10VCT @ 1.0A	5V @ 2.0A
RL-2220-10-2400	RLD-2220-10-2400	24.0	10VCT @ 2.4A	5V @ 4.8A
RL-2220-12-70	RLD-2220-12-70	1.0	12.6VCT @ 70mA	6.3V @ 140mA
RL-2220-12-100	RLD-2220-12-100	1.2	12.6VCT @ 100mA	6.3V @ 200mA
RL-2220-12-350	RLD-2220-12-350	4.4	12.6VCT @ 350mA	6.3V @ 700mA
RL-2220-12-800	RLD-2220-12-800	10.0	12.6VCT @ 800mA	6.3V @ 1.6A
RL-2220-12-2000	RLD-2220-12-2000	24.0	12.6VCT @ 2.0A	6.3V @ 4.0A
RL-2220-16-55	RLD-2220-16-55	1.0	16VCT @ 55mA	8V @ 110mA
RL-2220-16-75	RLD-2220-16-75	1.2	16VCT @ 75mA	8V @ 150mA
RL-2220-16-260	RLD-2220-16-260	4.4	16VCT @ 260mA	8V @ 520mA
RL-2220-16-640	RLD-2220-16-640	10.0	16VCT @ 640mA	8V @ 1.28A
RL-2220-16-1500	RLD-2220-16-1500	24.0	16VCT @ 1.50A	8V @ 3.0A
RL-2220-20-45	RLD-2220-20-45	1.0	20VCT @ 45mA	10V @ 90mA
RL-2220-20-60	RLD-2220-20-60	1.2	20VCT @ 60mA	10V @ 120mA
RL-2220-20-220	RLD-2220-20-220	4.4	20VCT @ 220mA	10V @ 440mA
RL-2220-20-500	RLD-2220-20-500	10.0	20VCT @ 500mA	10V @ 1.0A
RL-2220-20-1200	RLD-2220-20-1200	24.0	20VCT @ 1.20A	10V @ 2.40A
RL-2220-24-35	RLD-2220-24-35	1.0	24VCT @ 35mA	12V @ 70mA
RL-2220-24-50	RLD-2220-24-50	1.2	24VCT @ 50mA	12V @ 100mA
RL-2220-24-180	RLD-2220-24-180	4.4	24VCT @ 180mA	12V @ 360mA
RL-2220-24-450	RLD-2220-24-450	10.0	24VCT @ 450mA	12V @ 900mA
RL-2220-24-1000	RLD-2220-24-1000	24.0	24VCT @ 1.0A	12V @ 2.0A
RL-2220-28-30	RLD-2220-28-30	1.0	28VCT @ 30mA	14V @ 60mA
RL-2220-28-40	RLD-2220-28-40	1.2	28VCT @ 40mA	14V @ 80mA
RL-2220-28-160	RLD-2220-28-160	4.4	28VCT @ 160mA	14V @ 320mA
RL-2220-28-360	RLD-2220-28-360	10.0	28VCT @ 360mA	14V @ 720mA
RL-2220-28-800	RLD-2220-28-800	24.0	28VCT @ 800mA	14V @ 1.60A
RL-2220-34-25	RLD-2220-34-25	1.0	34VCT @ 25mA	17V @ 50mA
RL-2220-34-35	RLD-2220-34-35	1.2	34VCT @ 35mA	17V @ 70mA
RL-2220-34-125	RLD-2220-34-125	4.4	34VCT @ 125mA	17V @ 250mA
RL-2220-34-300	RLD-2220-34-300	10.0	34VCT @ 300mA	17V @ 600mA
RL-2220-34-700	RLD-2220-34-700	24.0	34VCT @ 700mA	17V @ 1.40A
RL-2220-40-20	RLD-2220-40-20	1.0	40VCT @ 20mA	20V @ 40mA
RL-2220-40-30	RLD-2220-40-30	1.2	40VCT @ 30mA	20V @ 60mA
RL-2220-40-110	RLD-2220-40-110	4.4	40VCT @ 110mA	20V @ 220mA
RL-2220-40-250	RLD-2220-40-250	10.0	40VCT @ 250mA	20V @ 500mA
RL-2220-40-600	RLD-2220-40-600	24.0	40VCT @ 600mA	20V @ 1.20A
RL-2220-56-15	RLD-2220-56-15	1.0	56VCT @ 15mA	28V @ 30mA
RL-2220-56-20	RLD-2220-56-20	1.2	56VCT @ 20mA	28V @ 40mA
RL-2220-56-80	RLD-2220-56-80	4.4	56VCT @ 80mA	28V @ 160mA
RL-2220-56-180	RLD-2220-56-180	10.0	56VCT @ 180mA	28V @ 360mA
RL-2220-56-420	RLD-2220-56-420	24.0	56VCT @ 420mA	28V @ 840mA
RL-2220-120-8	RLD-2220-120-8	1.0	120VCT @ 8mA	60V @ 16mA
RL-2220-120-10	RLD-2220-120-10	1.2	120VCT @ 10mA	60V @ 20mA
RL-2220-120-35	RLD-2220-120-35	4.4	120VCT @ 35mA	60V @ 70mA
RL-2220-120-85	RLD-2220-120-85	10.0	120VCT @ 85mA	60V @ 170mA
RL-2220-120-200	RLD-2220-120-200	24.0	120VCT @ 200mA	60V @ 400mA



RENCO ELECTRONICS, INC.

595 International Place, Rockledge, FL 32955-4200 USA

(321) 637-1000 • Toll Free Engineering Hot line 800-645-5828

SINCE 1955 Fax: (321) 637-1600 Web Site: www.rencousa.com E-mail: sales@rencousa.com